

COMMERCIAL

PRODUCT OFFERING

TEXAS



BELGARD
COMMERCIAL

Paver Applications



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

Paver Finishes

Finishes



Smooth

Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Antiqued

Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



Textured (slate)

Units are molded to form a surface that emulates natural stone with a sculpted, textured finish.

Dimensions™ Series Vehicular & Architectural Pavers


UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET	
								Smooth	Textured	Antiqued			
3-PIECE SYSTEM													
 Dimensions 6	30 mm 60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						✓			3 mm	120 105
 Dimensions 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm						✓			3 mm	120
 Dimensions 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm						✓			3 mm	112.5
SINGLE PIECE													
 3" x 9"	60 mm 80 mm	3" x 9"	60 mm 80 mm	80 mm	80 mm	80 mm		✓	✓			3 mm	90
 3" x 12"	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm			✓	✓		✓	3 mm	110 (60 mm) 88 (80 mm) 66 (101.6 mm)
 3" x 18"	101.6 mm	3" x 18"	101.6 mm					✓	✓			3 mm	49.5
 6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm			✓	✓		✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm		✓	✓		✓	3 mm	112.5 (60 mm) 90 (80 mm)
 6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm		✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm			✓	✓		✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 12" x 18"	60 mm	12" x 18"	60 mm					✓	✓			3 mm	120
 12" x 24"	60 mm	12" x 24"	60 mm					✓	✓			3 mm	120
 18" x 18"	60 mm	18" x 18"	60 mm					✓	✓			3 mm	90
 18" x 24"	60 mm	18" x 24"	60 mm					✓	✓			3 mm	120
 18" x 36"	60 mm	18" x 36"	60 mm					✓	✓			3 mm	90
 24" x 24"	60 mm	24" x 24"	60 mm					✓	✓			3 mm	80
 24" x 36"	60 mm	24" x 36"	60 mm					✓	✓			3 mm	120

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.







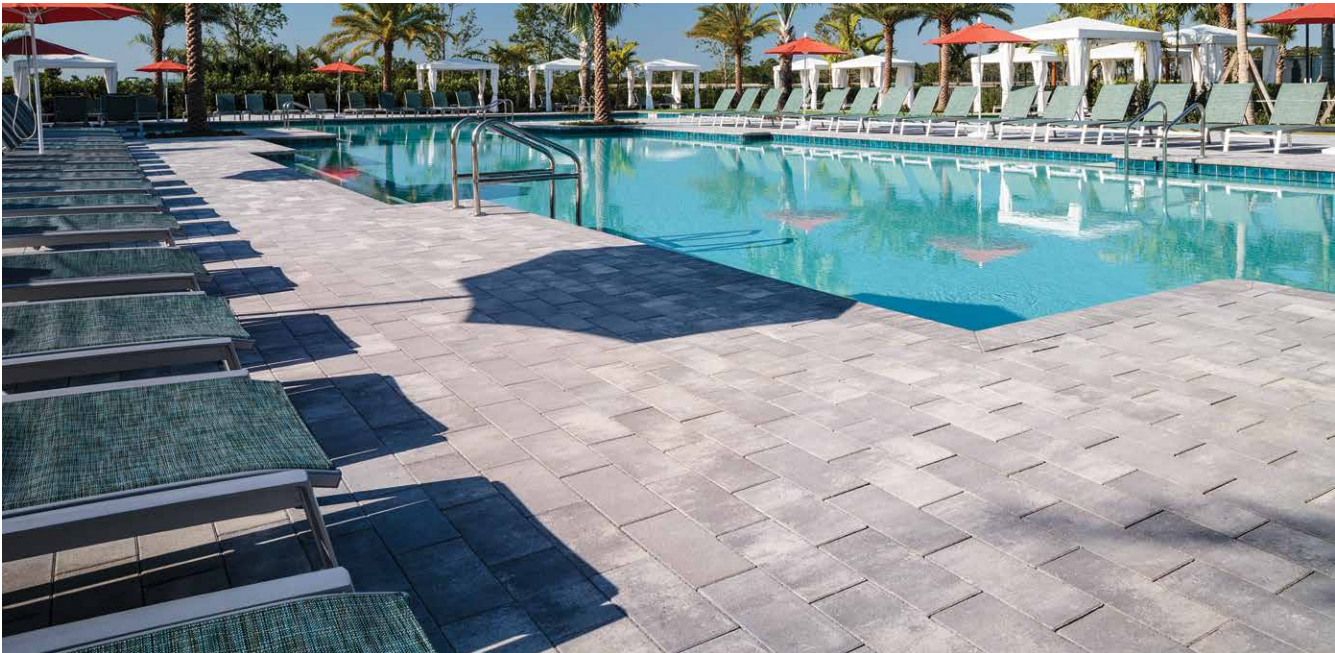


Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.











PICTURED ON SPREAD: DIMENSIONS SERIES



Moduline Series® Vehicular & Architectural Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET
									Smooth	Textured	Antiqued		
 4" x 12"	80 mm	4" x 12"	80 mm	80mm			✓		✓		✓	3 mm	85
 4" x 18"	80 mm	4" x 18"	80 mm				✓		✓			3 mm	72
 4" x 24"	80 mm	4" x 24"	80 mm				✓		✓			3 mm	96

Geometric Shapes

















UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET
									Smooth	Textured	Antiqued		
 Diamond	60 mm	12" x 12"	60 mm				✓		✓			3 mm	93.53
 12" Parallelogram (60° angle)	60 mm	3" x 12"	60 mm				✓		✓			3 mm	85.73
 18" Parallelogram (60° angle)	60 mm	6" x 18"	60 mm				✓		✓			3 mm	114.31
 Hexagon	60 mm	12" x 12"	60 mm				✓		✓			3 mm	100.02

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.


Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.

Vehicular & Architectural Pavers


UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET
									Smooth	Textured	Antiqued		
 Cambridge Cobble® (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						✓		✓	Round Chamfer	120
 Cambridge Cobble® 6 x 6	60 mm 80 mm	6" x 6"	60 mm	80 mm					✓		✓	Round Chamfer	120 (60 mm) 96 (80 mm)
 Cambridge Cobble® 6 x 9	60 mm 80 mm	6" x 9"	60 mm	80 mm					✓		✓	Round Chamfer	120 (60 mm) 96 (80 mm)
 Empire™	60 mm 80 mm	3" x 12"	60 mm	80 mm						✓		-	120 (60 mm) 96 (80 mm)
 Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm					✓				Rolled Edge	103.9
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	✓	✓	✓		✓	7 mm	120 (60 mm) 96 (80 mm)
 Melville™ Plank Small (3 pc)	60 mm	5" x 11 ³ / ₁₆ " 5" x 15 ³ / ₄ " 5" x 19 ¹ / ₁₆ "	60 mm				✓		✓			3 mm	114.53
 Melville™ Plank Large (3 pc)	60 mm	7 ¹ / ₂ " x 11 ³ / ₁₆ " 7 ¹ / ₂ " x 15 ³ / ₄ " 7 ¹ / ₂ " x 19 ¹ / ₁₆ "	60 mm				✓		✓			3 mm	122.71
 Papyrus™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓			✓		3 mm	112.5
 Travertino	30 mm 60 mm	6" x 6" 6" x 12" 12" x 12"	30 mm 60 mm				✓				✓	N/A	192 120

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

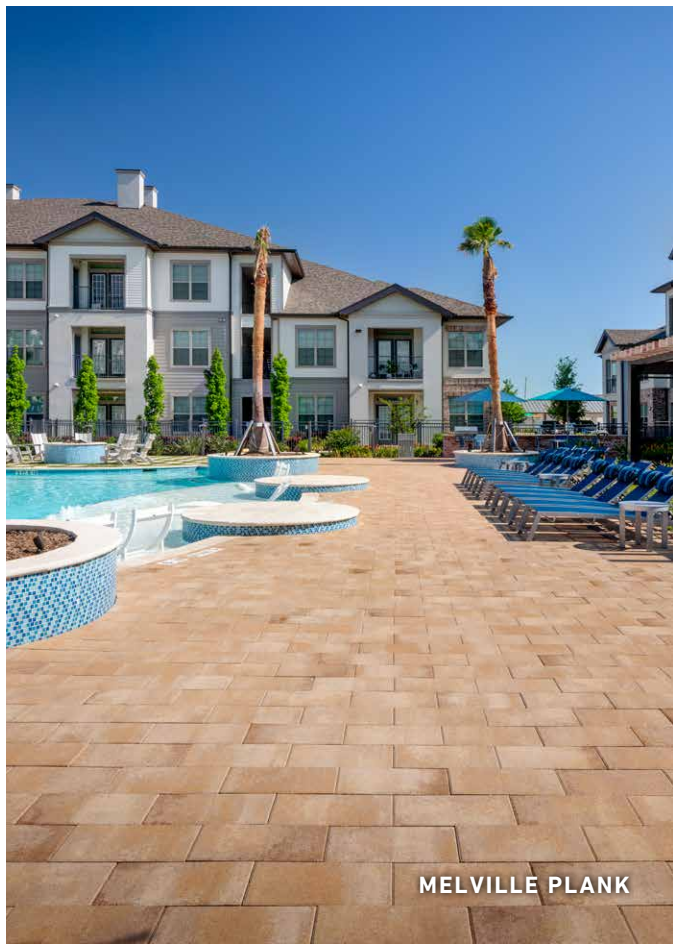


MELVILLE PLANK

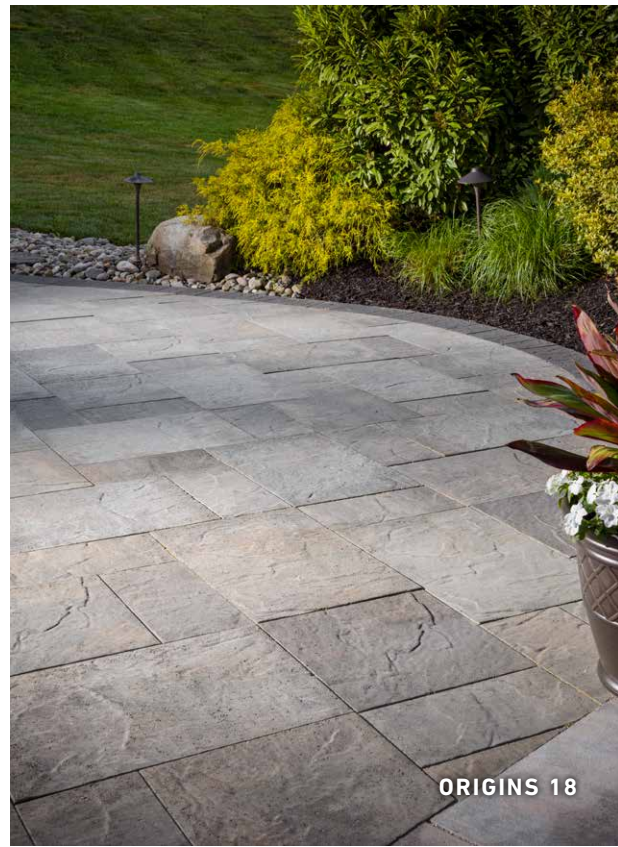

ORIGINS 18




PAPYRUS 18

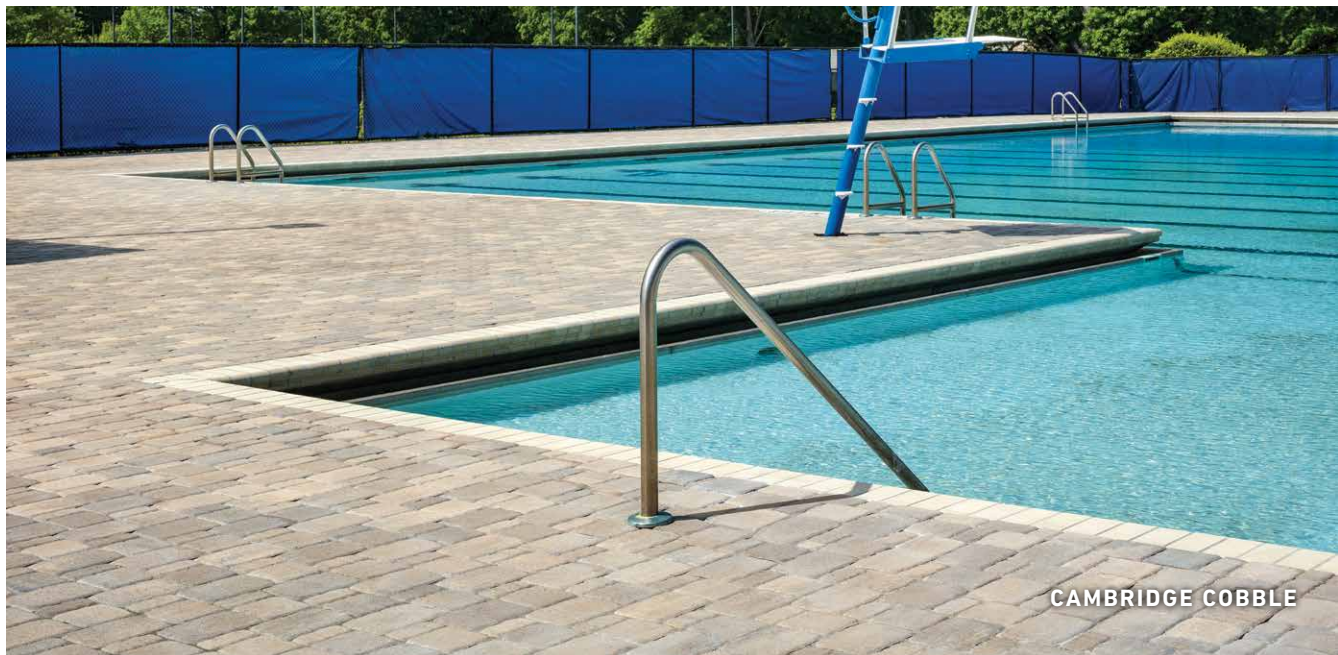

CAMBRIDGE COBBLE





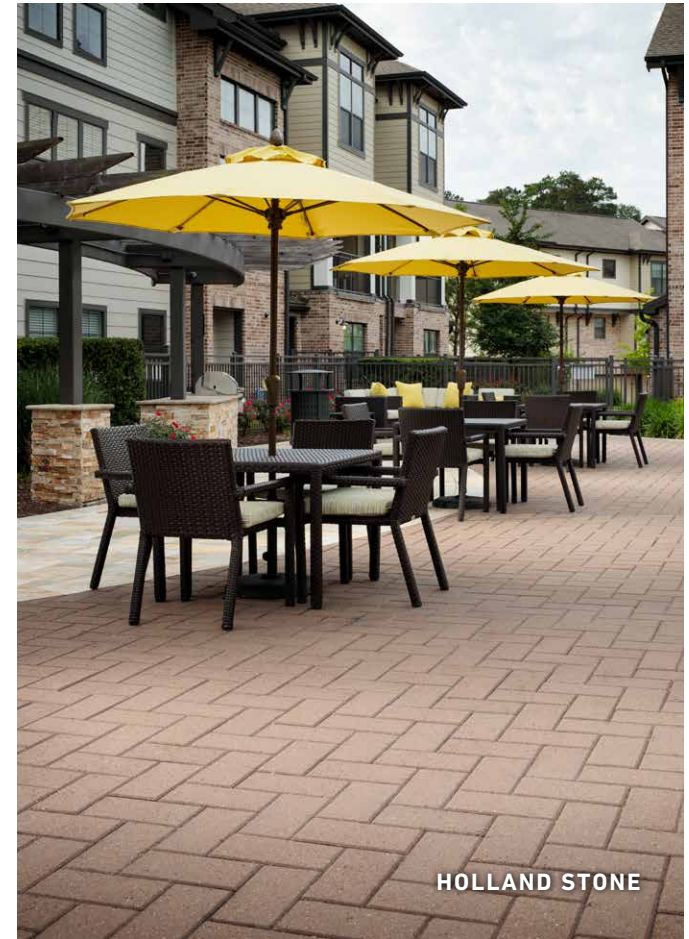









GEOMETRIC SHAPES










HOLLAND STONE

Permeable Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
									Smooth	Textured	Antiqued				
AQUALINE™ SERIES															
 3" x 12"	80 mm	3" x 12"	80 mm	80 mm			✓		✓			7 mm	10%	3 mm	88
 6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		✓		✓			7 mm	7%	3 mm	96
 6" x 12"	80 mm	6" x 12"	80 mm	80 mm			✓		✓			7 mm	5%	3 mm	96
 Ashlar 3-Piece	80 mm	4½" x 9" 4½" x 4½" 9" x 9"	80 mm	80 mm	80 mm	80 mm	✓		✓			10 mm	12%	3 mm	96
ADDITIONAL PRODUCT LINES															
 Aqua Roc™	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	✓	✓	✓			8 mm	9%	3 mm	97.4
 Eco Dublin®	80 mm	6¼" x 3¼" 6¼" x 6¼" 6¼" x 10¼"	80 mm	80 mm			✓	✓	✓		✓	12 mm	7%	N/A	91.6

Concrete Grid Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			% SURFACE OPENING	SQ. FT. PER PALLET
									Smooth	Textured	Antiqued		
 Turfstone™	80 mm	15¼" x 23½"	80 mm						✓			40%	101

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

Paver Available Colors

Solid Colors





Antiqued Paver Colors *(Tumbling is available for all solid and blended paver colors)*



Blended Colors



Note: Belgard® cannot guarantee printed color swatches will match actual product. All colors shown are approximate representations of the standard product. Actual colors may vary slightly due to batch variances and environmental conditions at time of photography. Actual sizes may vary by region. Please contact your local Belgard representative for accurate samples, availability and pricing.

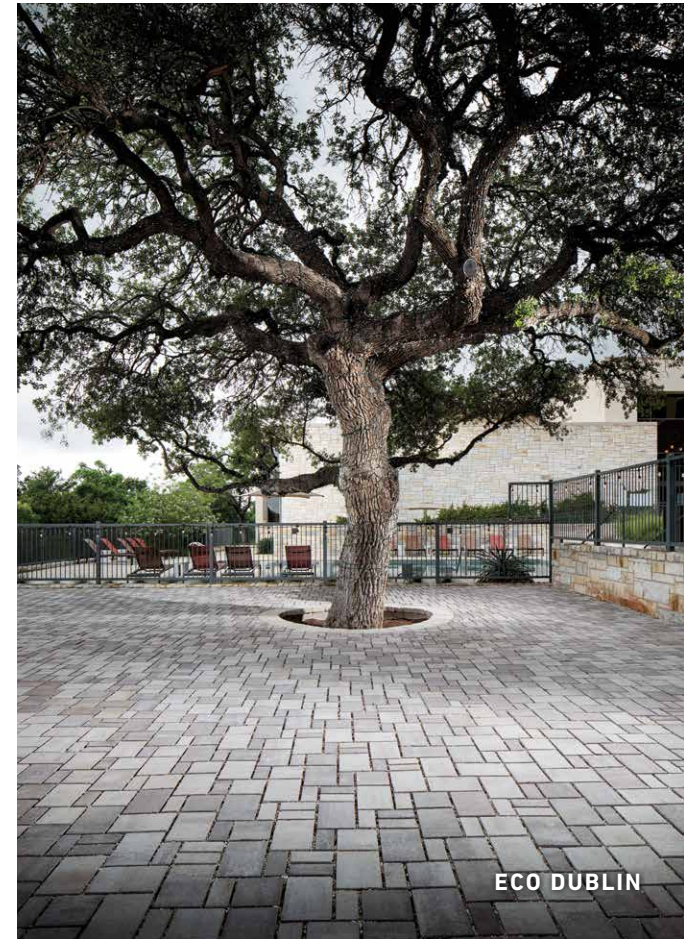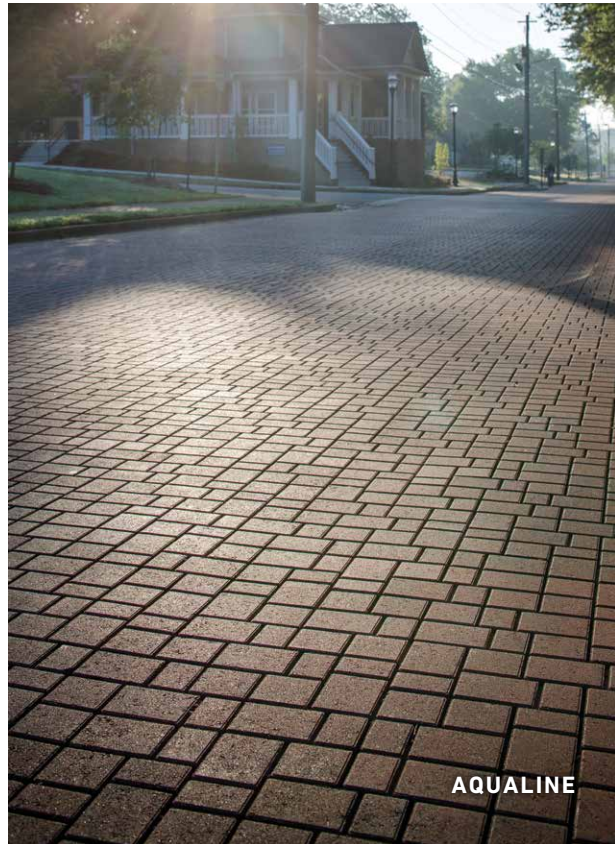

Porcelain Pavers

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									
 Glocal - 24 x 24	Concrete	3/4"	24" x 24"	Clear, Ideal, Type, Classic	✓	✓	232.5	60	2,160
 Glocal - 24 x 48	Stone	3/4"	24" x 48"	Clear, Ideal, Type, Classic	✓	✓	271.25	35	2,160
 Noon - 12 x 48	Wood	3/4"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,664
 November	Stone	3/4"	24" x 24"	Rain, Wind, Warm, Land	✓	✓	232.5	60	2,160
 Quarziti 2.0	Stone	3/4"	24" x 24"	Glacier, Mountains, Waterfall, River	✓	✓	232.5	60	2,160
 Quarziti 2.0	Stone	3/4"	24" x 48"	Glacier, Mountains, Waterfall, River	✓	✓	271.25	35	2,160
 Travertini Cross Cut	Travertine	3/4"	24" x 24"	Pearly, Light, Misty, Rustic	✓	✓	232.5	60	2,160
 Travertini Vien Cut	Travertine	3/4"	24" x 48"	Light, Dark, Misty	✓	✓	271.25	35	2,160
 Unico 2.0 Coping	Stone	3/4"	11.62" x 23.54"	Glacier, Mountains, Waterfall, River, Pearly, Light, Misty	✓		205.2	108	1,944



RESISTANT TO FREEZE THAW

Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60°F to +140°F).



RESISTANT TO BREAKAGE

Because every slab can withstand loads of over 2200 lbs.



RESISTANT TO CHEMICAL AGGRESSION

Because our pavers are unaffected by alkalis, acids, chemical agents, salt and other de-icing materials.



RESISTANT TO STAINS

Because a high density and ultra-low absorption rate creates a tight paver surface, it fends off surface mold, moss, dirt and other types of stains.



EASY TO LAY

Because of superior accuracy in dimensional sizing and linear sides, the pavers allow for perfectly executed installations with tight and accurate lines.



EASY TO CLEAN

Because it can be cleaned with normal household cleaners and even pressure washed with a **low pressure** washing device.*



EASY TO REMOVE

Because a 24" x 24" slab weighs just 37 lbs., its light weight permits easy removal, serviceability and even reusability. (Excluding adhered installations).




EASY FOR YOU

Because the structured top textures formed on the surface of our pavers create slip resistant surfaces.

* It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.

If installing on elevated surface over 3/4" all porcelain must have a factory applied fiber mesh backing.


Spacers are required for all porcelain paver installations. For vehicular applications, there must be a mortar install over a concrete slab. Visit Belgard.com/porcelain for additional installation details.

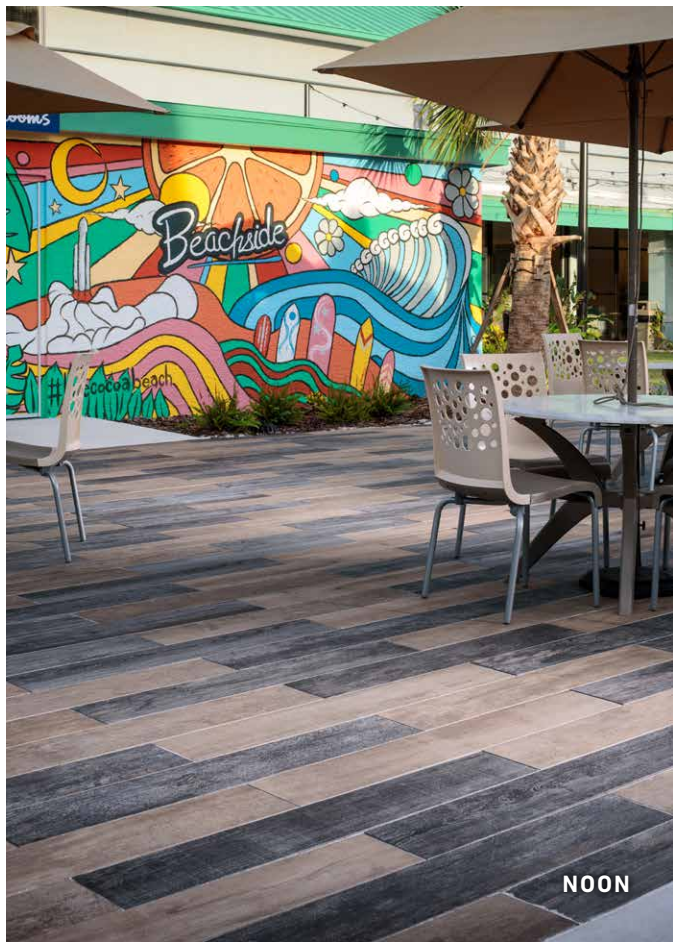

NOON



TRAVERTINI

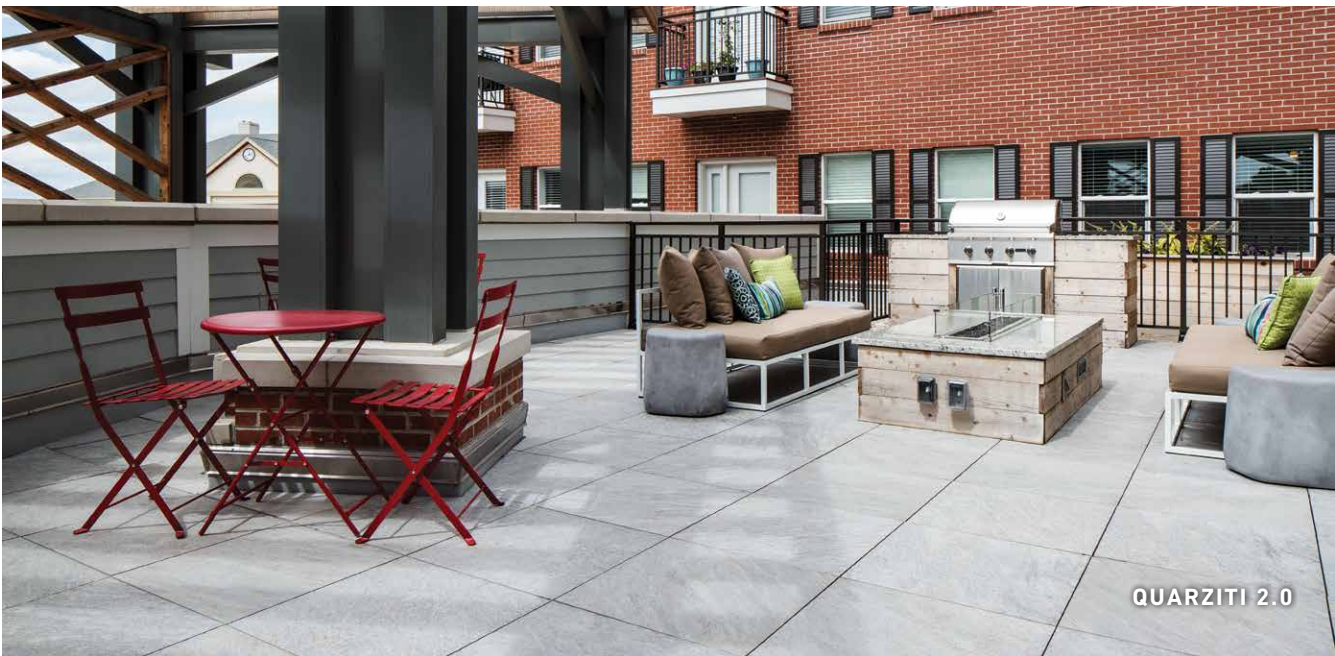

QUARZITI 2.0



QUARZITI 2.0








NOON








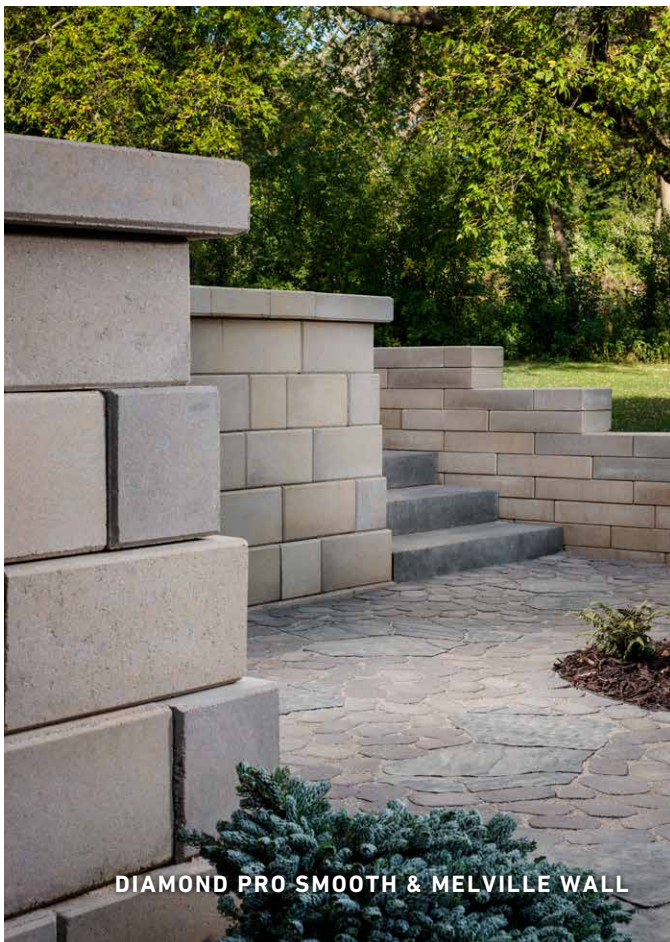
GLOCAL

Segmental Retaining Walls (SRW)

UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE		FACE STYLES						BATTER/ SETBACK	SQ. FT. PER PALLET	
	Height	Width	Depth	Block		Column/ Corner Unit	Cap	Sculpted	Split	Straight	Beveled	Virtual Joint**	Victorian	Stone Cut	Smooth			Quarried
 Diamond® 9D	6"	17¾"	9"	Rear Lip		✓	✓		✓			✓		✓			10.6°	35.5
 AB® Classic	8"	18"	12"	Front Lip			✓		✓	✓							6°	40
 Diamond Pro®	8"	18"	12"	Rear Lip		✓	✓	✓	✓	✓	✓			✓	✓	✓	7.1°	36
 Diamond Pro® PS	8"	18"	12"	Fiberglass Pins		✓	✓		✓	✓	✓	✓	✓	✓			Near Vertical, 7.1°	36
 Diamond Pro® Air	8"	18"	11½"	Front Lug		✓	✓		✓	✓							4°	36

Freestanding Walls (FSW)

UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES					BATTER/ SETBACK	SQ. FT. PER PALLET	
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Split	Antiqued	Straight	Beveled	Virtual Joint**	Victorian	Stone Cut			
 Easton™ Wall	4"	8", 12", 16"	8"				✓			✓	✓						Vertical	42
 Easton™ Wall Universal	4"	12"	8"				✓			✓	✓						Vertical	112 pieces
 Melville™ Wall	4"	20"	10"								✓						Vertical	26.67
 Weston Stone™	4"	8", 12", 16"	8"				✓			✓	✓						Vertical	42
 Weston Stone™ Universal	4"	12"	8"				✓			✓	✓						Vertical	112 pieces



DIAMOND PRO SMOOTH & MELVILLE WALL



DIAMOND PRO AIR




DIAMOND PRO BEVELED FACE



DIAMOND PRO VIRTUAL JOINT



WESTON WALL

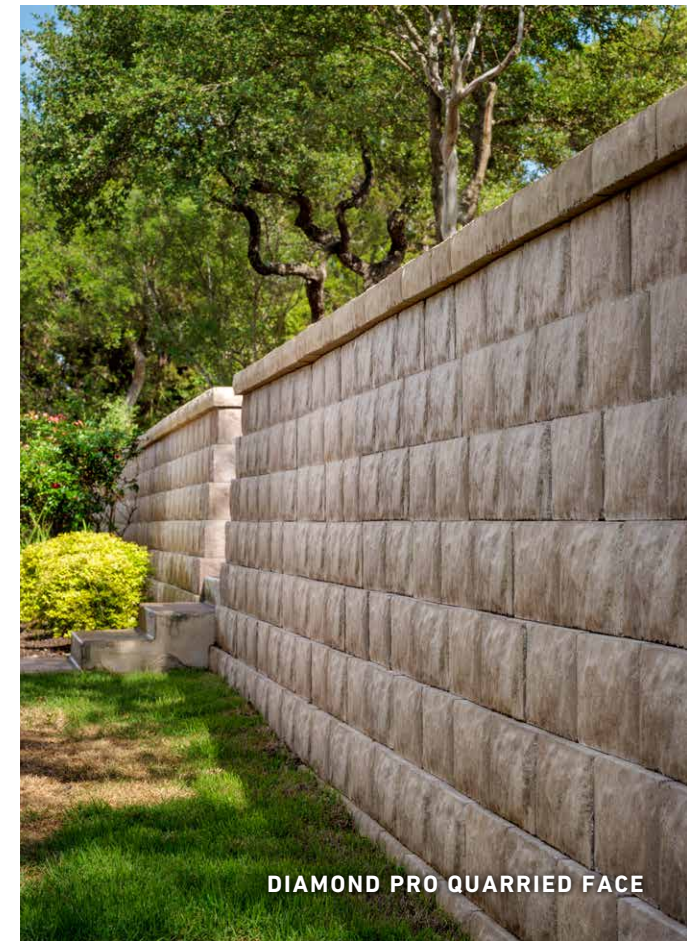

DIAMOND PRO QUARRIED FACE

Wall Available Colors



Gray



Fossil Beige



Tan



Lueders Gray



Hill Country Blend



Llano Blend



Bayou Blend



Charcoal



Danville Beige



Danville Beige Quarried




Lueders Gray Quarried







Limestone

AB[®] Fencing System

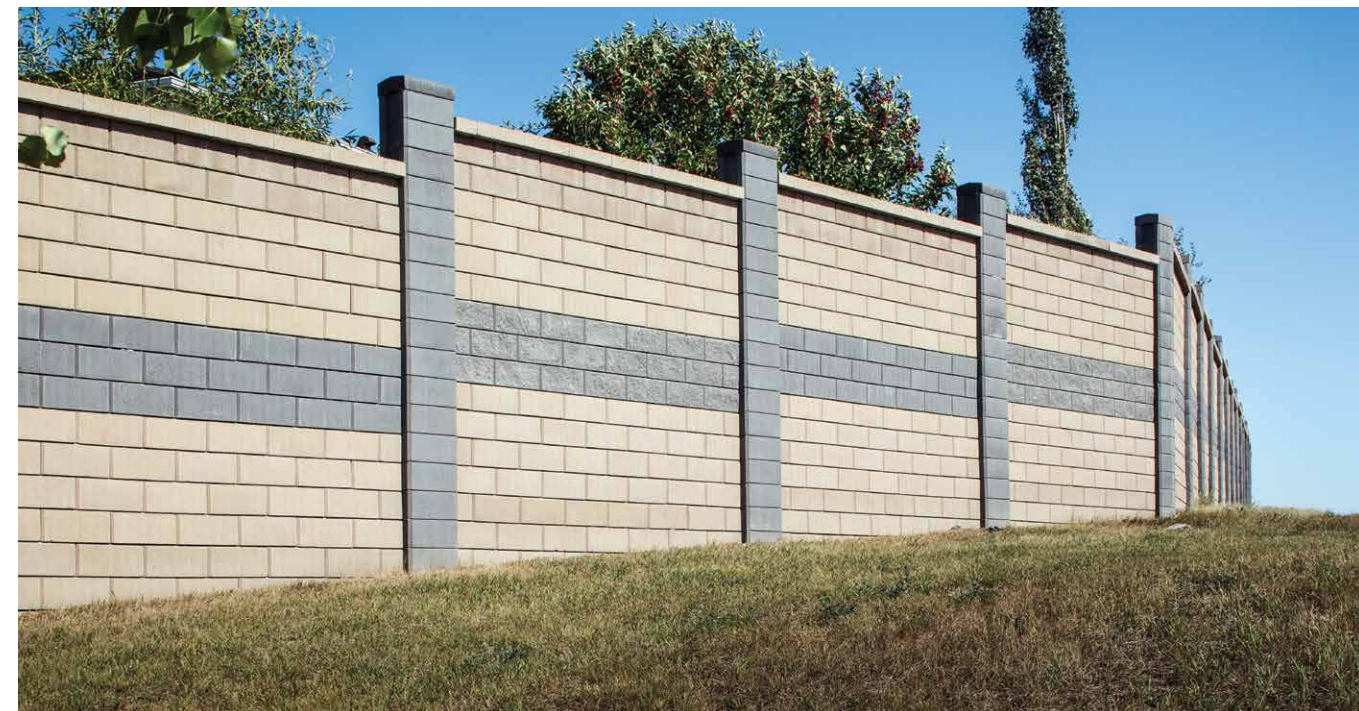UNITS	UNIT SIZE			TEXTURE		BATTER/ SETBACK	QTY PER PALLET
	Height	Width	Depth	Striated	Split		
Half	8"	5 5/8"	9.188"	✓	✓	Vertical	144
Lite	4 1/2"	5 5/8"	17 5/8"	✓	✓	Vertical	96
1/2 Lite	4 1/2"	5 5/8"	9.188"	✓	✓	Vertical	192
Post Block	8"	18"	12"	✓	✓	Vertical	48
Panel Block	8"	18"	6"	✓	✓	Vertical	72
Cap Block	4"	18"	12"	✓	✓	N/A	48



Accessories

UNITS		SIZE	UNITS/ PALLET	LAYER/ PALLET	WEIGHT/ UNIT	WEIGHT/ PALLET (LBS)
	Landings™ Step Unit	6" x 48" x 18"	2	-	462	924
	Laguna™ Coping	14 ³ / ₁₆ " x 23 ⁵ / ₁₆ " x 2 ³ / ₁₆ "	40	10	50	2,200
	Marina™ Coping	5 1 ⁵ / ₁₆ " x 11 1 ³ / ₁₆ " x 2 ³ / ₁₆ "	105	5	-	2751
	Unico Porcelain Coping	12.99" x 23.54" x 3/4"	120	-	-	2080

Accessories Available Colors

Landings™ Step Unit



Foundry



Moonlight

Laguna™ Coping



Pearl

Marina™ Coping




Charcoal




Foundry



Suede

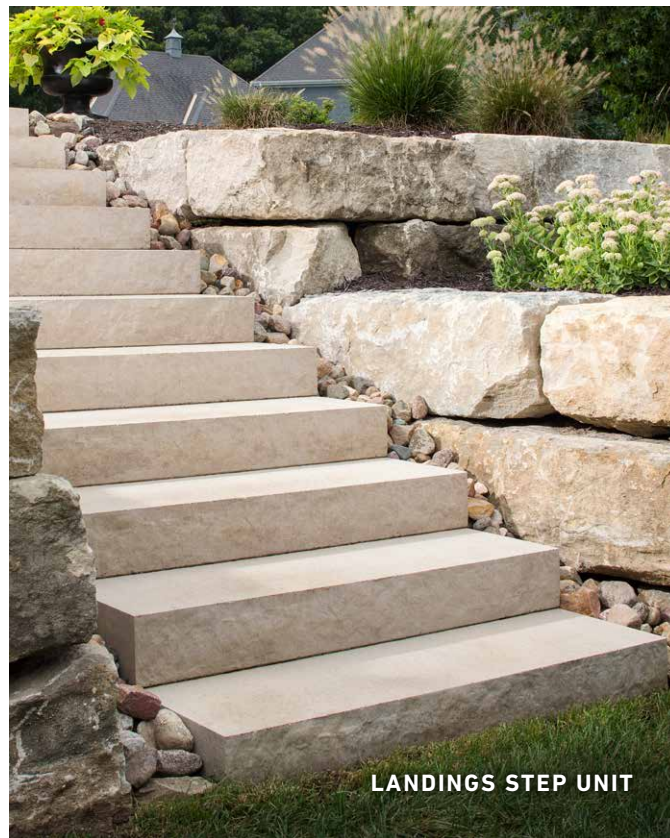

LANDINGS STEP UNIT

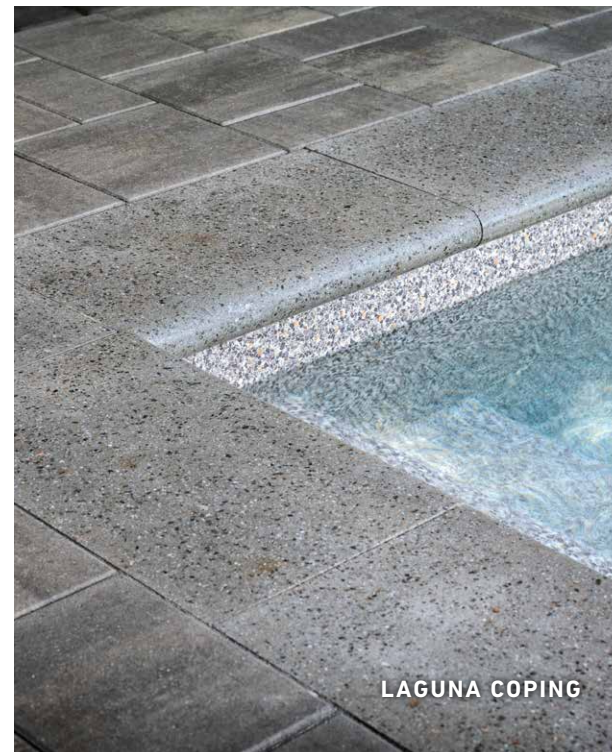

LAGUNA COPING



MARINA COPING

Rooftop Pavers & Pedestals

Possibilities are endless when designing and building plaza decks using Belgard Commercial Pedestals. The pedestal system's elevation range of 1/8" - 36" allows for building plaza decks over almost any sloping or difficult surface.

Building plaza decks over occupied space has never been easier. The unique screw-to-adjust feature eliminates tedious and time-consuming installation often associated with constructing level decks over sloping surfaces. Construction crews quickly level each plaza paver by adjusting pedestal height, even while loaded.

Future access to waterproofing entails simply removing specific plaza pavers. Pedestal adjustments within the allowed range are accomplished by merely adjusting pedestal height and you're done – saving time and money.

SPECIFICATIONS

- Supports up to 1000 lbs.
- Maximum elevation up to 36" using couplers and braces
- Impervious to water, mold & freeze-thaw
- Preassembled
- Packaged in weather-resistant boxes
- Contains 20% post-industrial recycled material
- Engagement "bumps" warn of over-extension

RESOURCES AVAILABLE

- CAD details
- Specifications
- Technical cut sheets
- Maintenance guide
- Videos: planning, installation & more
- Take-off assistance
- Samples available
- Technical assistance
- Customer service




	MODEL SE SUPPORTS	MODEL NM SUPPORTS	PEDESTAL PRIME SUPPORTS
Self Leveling Head	✓		✓
Fixed Head	✓	✓	✓
Adjustable	✓	✓	✓
Extendable w/ Coupler	✓	✓	✓
Adjustment Key	✓	✓	✓
Locking IPE Pins	✓	✓	✓
Recycleable (LEED)	✓	✓	✓
Loading Capacity	✓	✓	✓
Integrated Extension Coupler			✓

Rooftop Plaza Pavers

UNITS	THICKNESS	SIZE	MATERIAL	FINISHES				PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
				Smooth	Matte	Shot Blast	Diamond				
Jewell Plaza Slabs	2"	24" x 24"	Concrete	✓				✓	88	22	1,771
Classic Plaza Slabs	2"	24" x 24"	Concrete	✓	✓	✓	✓	✓	<i>Varies per selection. Contact your local Belgard Representative for more information.</i>		
Glocal	¾"	24" x 24"	Porcelain	✓				✓	232.5	60	2,160
Wood Plaza Slab (IPE, Cumaru, or Grappa)	¾"	23¾" x 23¾"	Ipe	✓				✓	600	150	3,375
Quarziti 2.0	¾"	24" x 24"	Porcelain	✓				✓	232.5	60	2,160

Rooftop Pavers

UNITS	THICKNESS	SIZE	MATERIAL	FINISHES				PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
				Smooth	Matte	Shot Blast					
Ballast Pavers	1⅝"	8½" x 16"	Concrete	✓					190	200	2,599

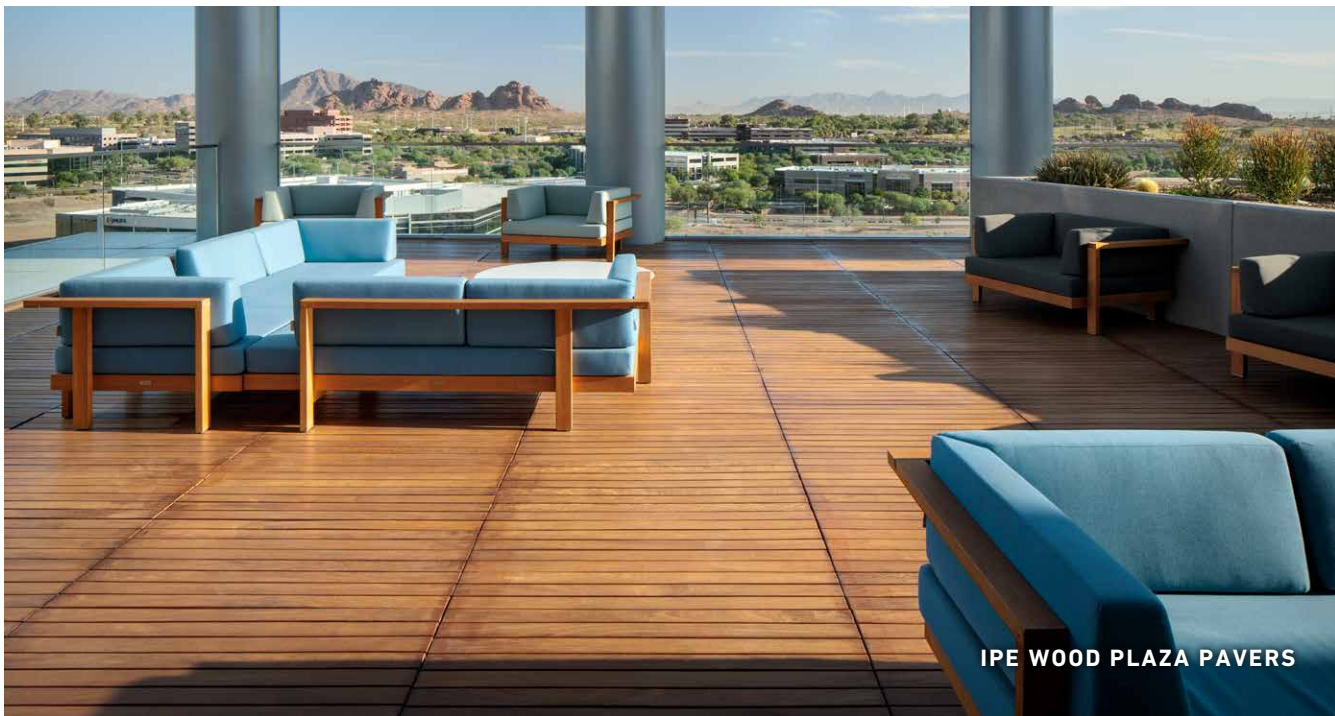

IPE WOOD PLAZA PAVERS



BALLAST PAVERS



JEWELL PLAZA SLABS

Jewell Plaza Slabs



Foundry




Graphite

Belgard has solutions for high wind applications and paver layout services. Please contact your local representative for more information.

Pedestals & Accessories

PRODUCT NAME	PRODUCT DESCRIPTION	PIECES PER CARTON
STAR-T	3/8" - 9/16" (10-15mm)	50
STAR-B	3/16" Extension (5mm)	50
SE0-P	1.125" - 1.5" (28-38mm)	40
SE1-P	1.5" - 2" (37.5-50mm)	30
SE2-P	2" - 3" (50-75mm)	25
SE3-P	3" - 4.75" (75-120mm)	25
SE4-P	4.75" - 6.75" (120-170mm)	25
SE5-P	6.75" - 8.75" (170-215mm)	25
NM-1	1" - 1.57" (25-40mm)	40
NM-2	1.57" - 2.75" (40-70mm)	30
NM-3	2.36" - 3.93" (60-100mm)	25
NM-4	3.54" - 6.30" (90-160mm)	15
NM-5	5.90" - 10.63" (150-270mm)	12
NM-EXT	5.7" Extension (145mm)	30
EH-12	1/2" Fixed (12mm)	250
EH-15	5/8" Fixed (16mm)	200
EH-20	3/4" Fixed (20mm)	150
RUB-14	1/4" Fixed RUBBER	150
RUB-38	3/8" Fixed RUBBER	150
RUB-PINS	1/4" Fixed w/ 4 Pins	100
PR1	1.2" - 2.55" Adjustable Pedestal	1 per box
PR2	6.1" Adjustable Pedestal	1 per box
PR3	16" Adjustable Pedestal	1 per box

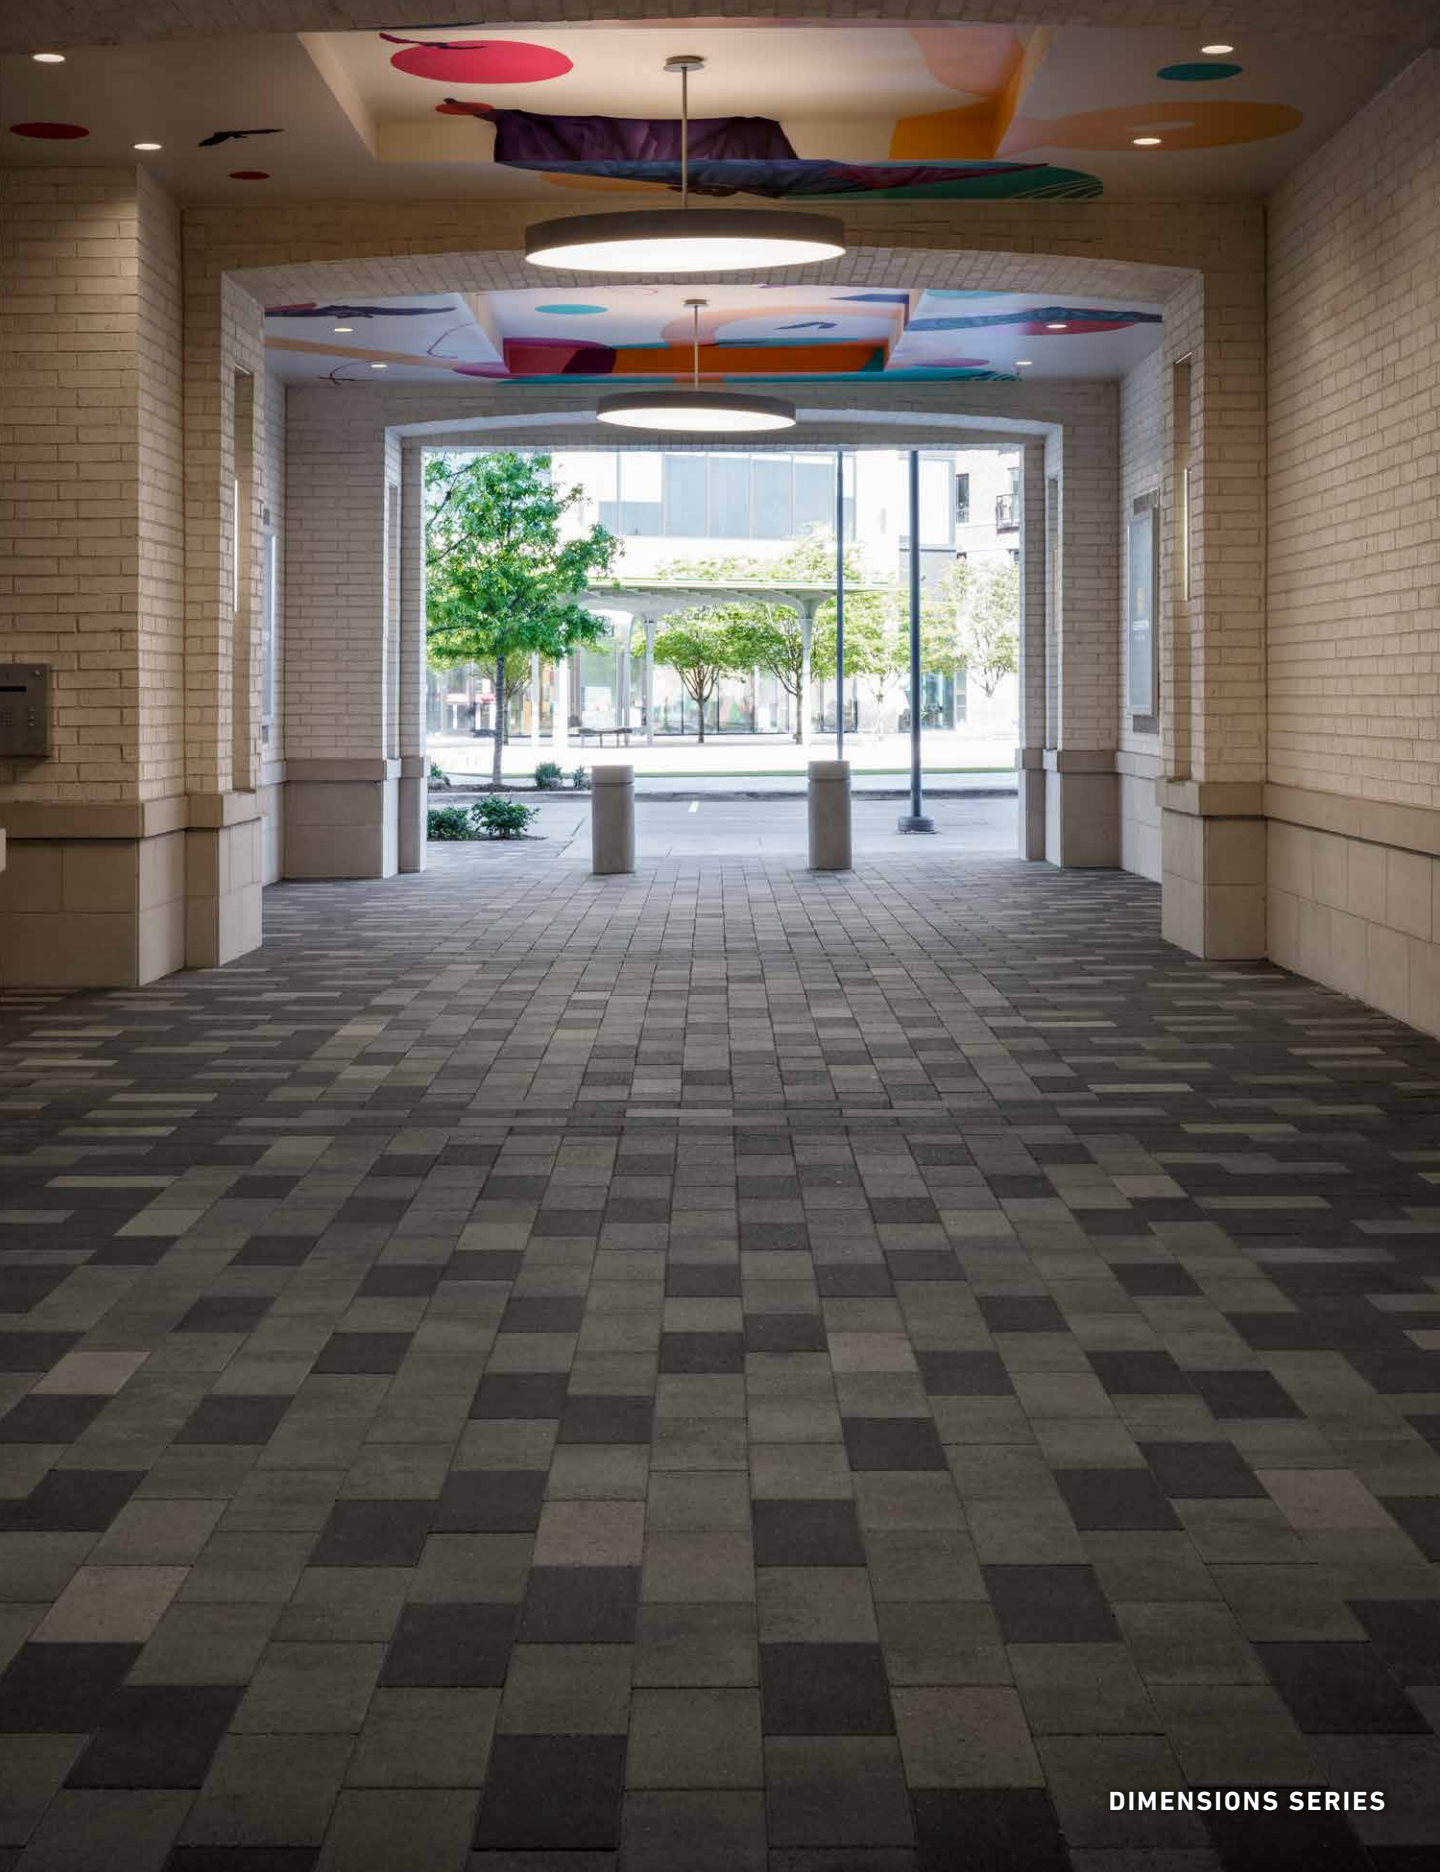

Professional Support



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



ROOFTOP PLAZA LAYOUT SERVICES

Belgard can provide a rough component count based on square footage. This will include paver counts and pedestal counts. Once the project is awarded, a detailed layout can be created showing more precise pedestal counts, heights and locations.



400 Jewell Drive
Waco, TX 76712
Ph: 800-792-3216

1607 Spur 529
Rosenberg, TX 77471
Ph: 800-792-3216

Denton, TX
Coming Soon



BELGARDCOMMERCIAL.COM