

COMMERCIAL

PRODUCT OFFERING

FLORIDA



BELGARD
COMMERCIAL

Paver Finishes & Applications



Standard (smooth)

Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.




Antiqued

Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



Ground Face


The top of the paving units are ground smooth which exposes the aggregate colors and pigmented background.



Specialty Aggregate and Ground Face

Specialty aggregates, such as coarse sand, colored glass or shells are added as a face mix. The top of the paving units are ground smooth, exposing the specialty aggregate colors.

Please contact your local Sales Representative for product availability.

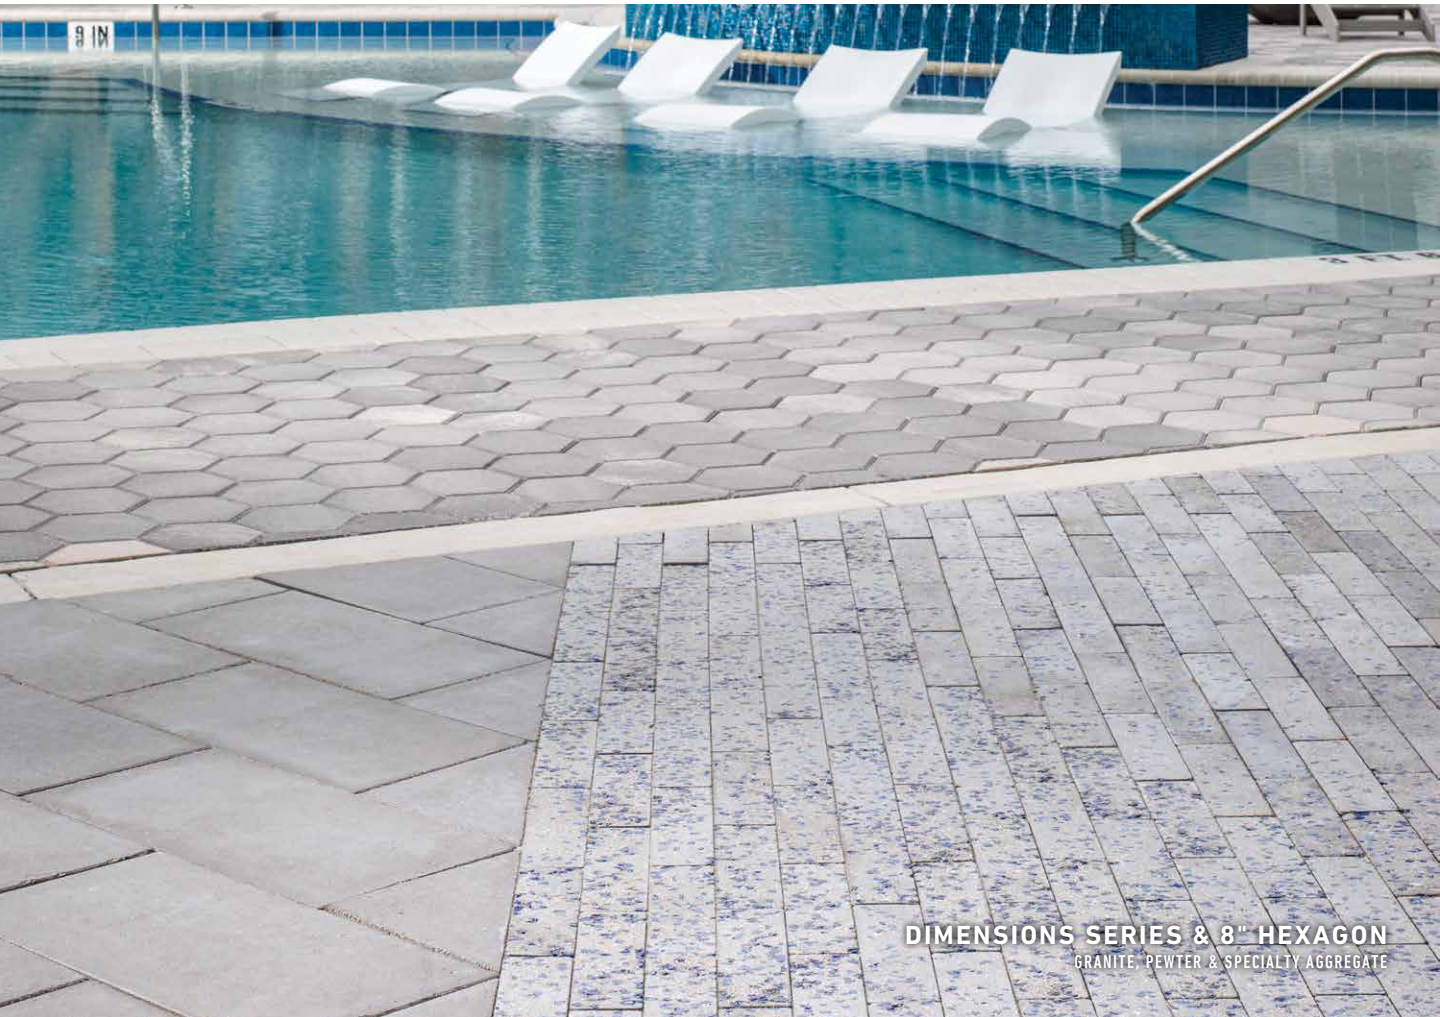

DIMENSIONS SERIES & 8" HEXAGON
GRANITE, PEWTER & SPECIALTY AGGREGATE

Paver Application Recommendations

The following chart contains general recommendations for both interlocking and permeable concrete pavement systems including minimum thickness and maximum aspect ratio for several traffic types and uses. While this chart provides general recommendations, a pavement design professional should confirm that the product selected meets local standards and site-specific traffic and use conditions.

TRAFFIC TYPES	TYPICAL USES	TYPICAL LIFETIME DESIGN ESALS	TRAFFIC INDEX	MAXIMUM ASPECT RATIO	MINIMUM THICKNESS	ICP ¹	PICP ²	HEAVY VEHICLES ³ PER DAY
Pedestrian	Pedestrian Commercial Plaza Residential Driveways	0 ≤ 10,000	0 5.2	N/A 4:1	60 mm 60 mm	✓ ✓	✓ ✓	0 < 1
Light Vehicles	Commercial/Business Parking Access Ways	≤ 30,000	5.9	4:1	80 mm	✓ ✓	✓ ✓	≤ 5
Occasional Heavy Vehicles	Facility Parking Residential Roadways	≤ 90,000 ≤ 110,000	6.7 6.9	3:1 3:1	80 mm 80 mm	✓ ✓	✓ ✓	≤ 10 ≤ 10
Frequent Heavy Vehicles	Local Roads Commercial Roads & Bus Parking Minor Collector Major Collector Arterial	≤ 330,000 ≤ 500,000 ≤ 1,000,000 ≤ 5,000,000 ≤ 9,000,000	7.8 8.3 9.0 10.2 11.6	3:1 3:1 3:1 3:1 3:1	80 mm 80 mm ⁵ 80 mm ⁵ 101.6 mm 101.6 mm	✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓	>10 >10 >10 >10 >10

1. Consult ASCE 58-16 Structural Design of Interlocking Concrete Pavement for Municipal Streets and Roadways for ICP design guidance

2. Consult ASCE 68-18 Permeable Interlocking Concrete Pavement for PICP design guidance

3. Heavy vehicles are defined as any vehicle larger than a single unit truck as defined by AASHTO.

4. Areas subject to occasional maintenance or emergency vehicles shall have a maximum aspect ratio of 4:1 for 60 mm pavers and 5:1 for 80 mm pavers

5. Projects with high volumes of heavy vehicles should consider using 101.6 mm pavers

6. Concrete grid pavers can be used in parking lot and emergency access ways up to a maximum of 7,500 lifetime ESALs and a maximum of ≤ 2 heavy vehicles per day. (Aspect ratio is not applicable for grid pavers)

7. The above chart is for general guidance. When selecting pavers for site-specific conditions, please consult your local Belgard Sales representative for assistance



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

Color Palette

Solids

Consistent color tone used throughout products used primarily for design accents or to create a neutral backdrop.



WHITE* - SR¹: 0.50, SRI²: 59



GRAY*



CREAM* - SR¹: 0.50, SRI²: 59



MALT* - SR¹: 0.50, SRI²: 58



PEWTER*



CHARCOAL*

Tone-on-Tone

Variations of the same color in adjacent shades and tones, typically used for products with contemporary aesthetics.



SCANDINA GRAY*



SEPIA*



HICKORY**



SLATE



ANTHRACITE

*Available in Pavers Only **Available in Walls Only

NOTE: LEED V4.1 and V5 provide potential points for heat island mitigation when light colored pavers and have a new (initial) SR of ≥ 0.33

1: Solar reflectance as measured in accordance with ASTM C1549

2: Solar reflectance index as calculated based on ASTM E1980.

Blends

Blends of three or more complementary or contrasting colors, creating a more dramatic look.



CHESWICK*



KNIGHTSBRIDGE*



AMARETTO* - SR¹: 0.36, SR²: 40



RIO*



NAPOLI




ASHWOOD*



HARVEST BLEND*



ADOBE*

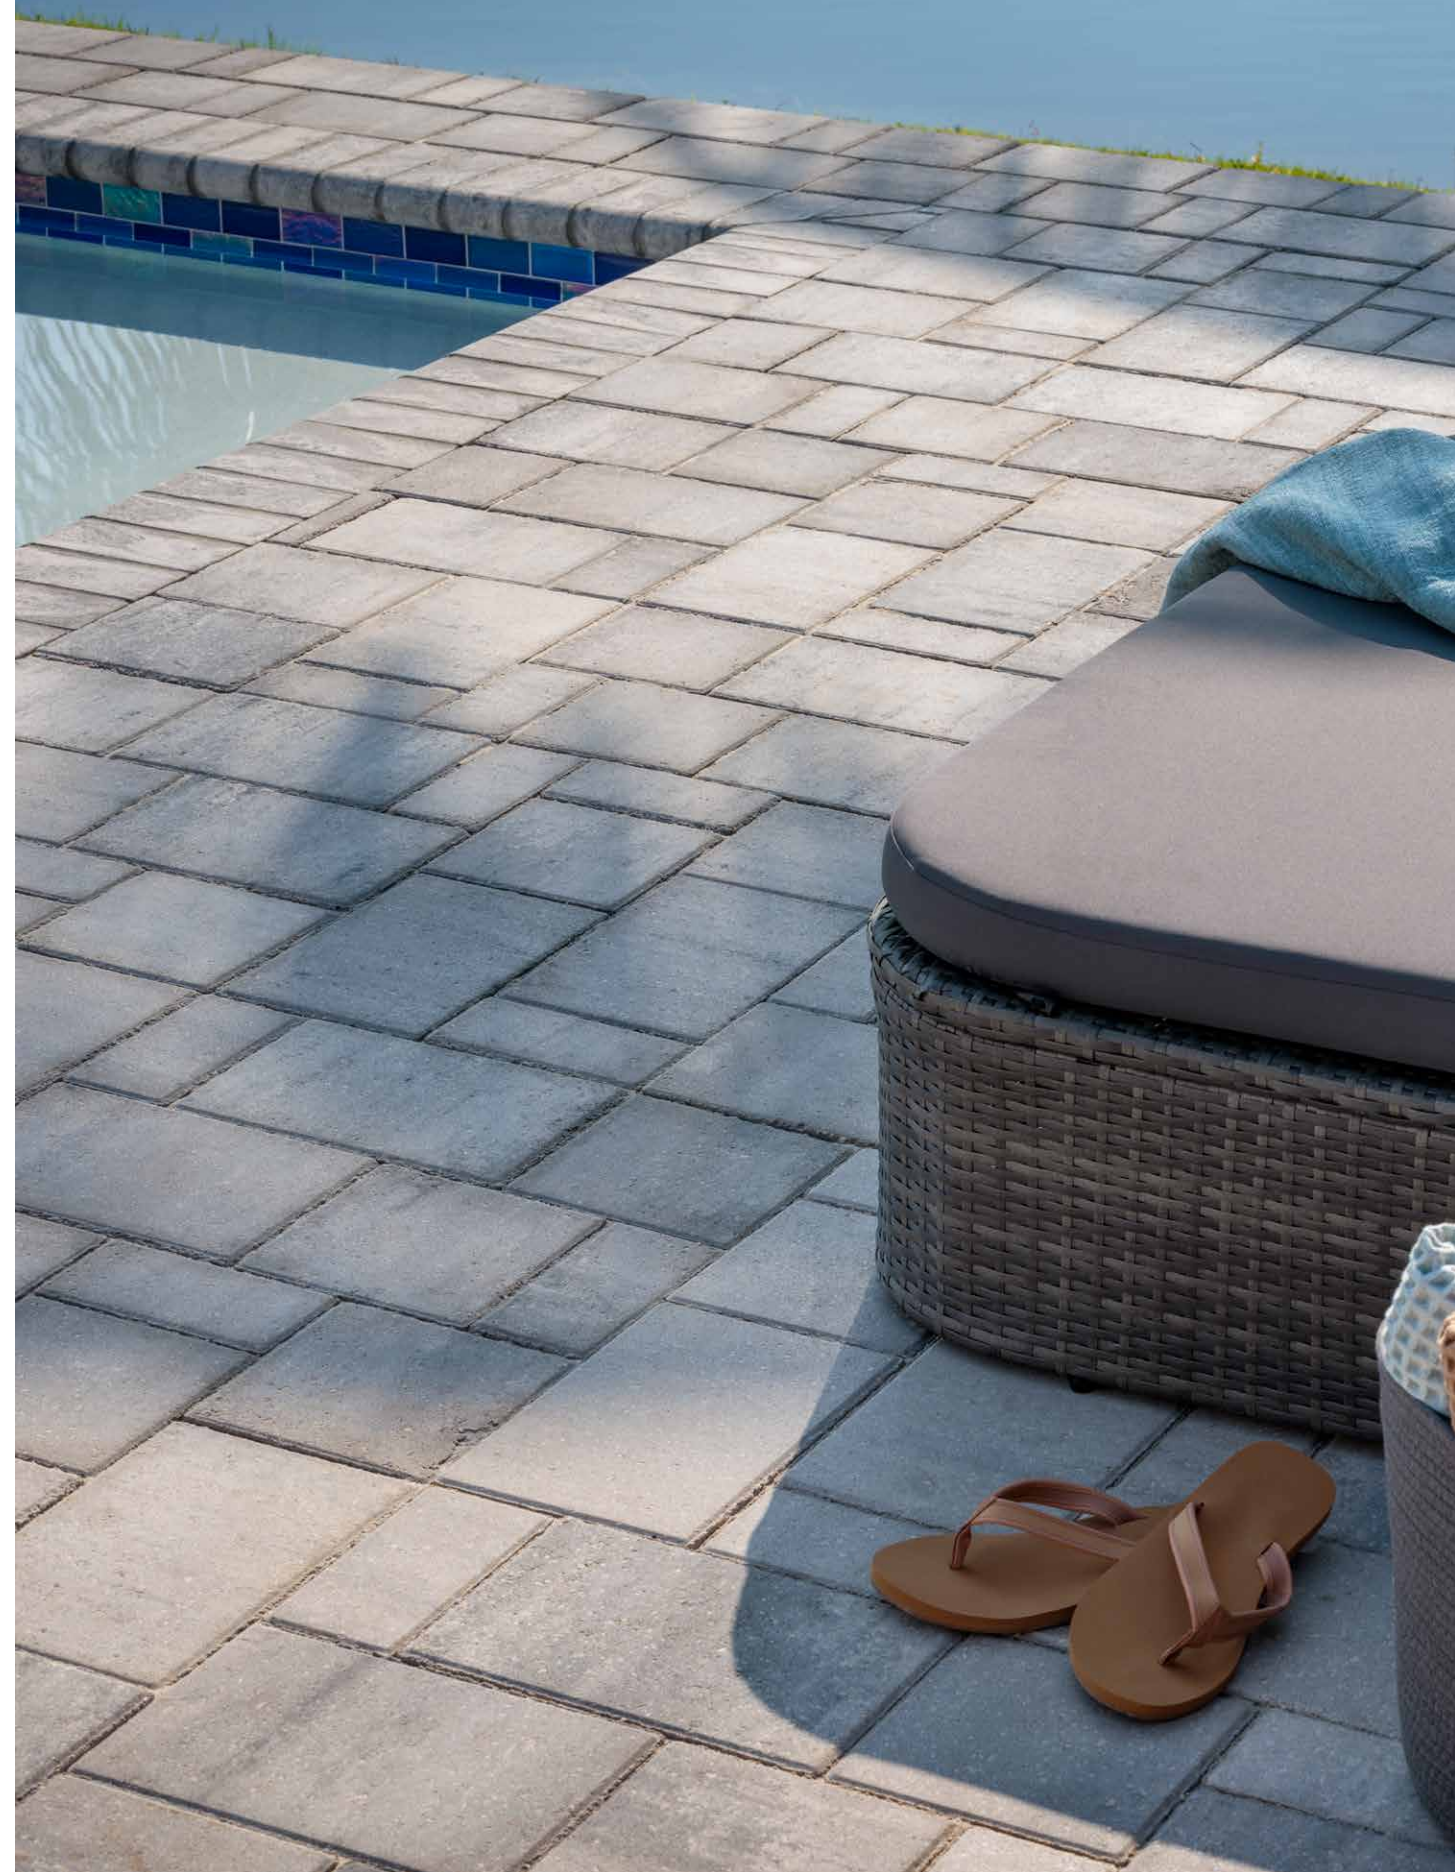

*Available in Pavers Only **Available in Walls Only

NOTE: LEED V4.1 and V5 provide potential points for heat island mitigation when light colored pavers and have a new (initial) SR of ≥ 0.33

1: Solar reflectance as measured in accordance with ASTM C1549


2: Solar reflectance index as calculated based on ASTM E1980.

Vehicular & Architectural Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Ground Face	Antiqued		
MODULINE SERIES®													
 Moduline 4" x 12"	101.6 mm	4" x 12"	101.6 mm	101.6 mm	101.6 mm		✓		✓	✓		3 mm	64
 Moduline 4" x 12", 4" x 16" Combo	80 mm	4" x 12" 4" x 16"	80 mm				✓		✓	✓		3 mm	78
DIMENSIONS™ SERIES													
 Dimensions 3" x 12"	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm		✓		✓	✓		3 mm	100 (60 mm) 88 (80 mm) 88 (101 mm)
 Dimensions 6" x 12"	60 mm 80 mm	6" x 12"	60 mm	80 mm			✓		✓	✓		3 mm	120 (60 mm) 96 (80 mm)
 Dimensions 12" x 12"	60 mm	12" x 12"	60 mm				✓		✓	✓		3 mm	120
 Dimensions 12" x 24"	60 mm	12" x 24"	60 mm				✓		✓			3 mm	120
 Dimensions 9" x 18"	60 mm	9" x 18"	60 mm				✓		✓			3 mm	112.5
 Dimensions 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm				✓		✓			3 mm	120
 Dimensions 18	60 mm	9" x 18" 18" x 18" 18" x 27"	60 mm				✓		✓			3 mm	112.5
OCEANSIDE SERIES													
 Oceanside 4 x 8	30 mm 60 mm	4" x 8"	30 mm 60 mm				✓		✓	✓		N/A	145 (30 mm) 96 (60 mm)
 Oceanside 8 x 8	60 mm	8" x 8"	60 mm				✓		✓	✓		N/A	96
 Oceanside 8 x 12	60 mm	8" x 12"	60 mm				✓		✓	✓		N/A	96
 Oceanside 12 x 12	30 mm 60 mm	12" x 12"	30 mm 60 mm				✓		✓	✓		N/A	192 (30 mm) 96 (60 mm)
 Oceanside 16 x 16	60 mm	16" x 16"	60 mm				✓		✓	✓		N/A	107
GEOMETRIC SERIES													
 12" Diamond	60 mm	12" x 18"	60 mm				✓		✓			3 mm	93.53
 8" Hexagon	80 mm	8" x 8"	80 mm	80 mm	80 mm		✓		✓			7 mm	**
 12" Hexagon	60 mm	12" x 12"	60 mm				✓		✓			7 mm	**
 16" Hexagon	60 mm	16" x 16"	60 mm				✓		✓			7 mm	**




OCEANSIDE
GRAY

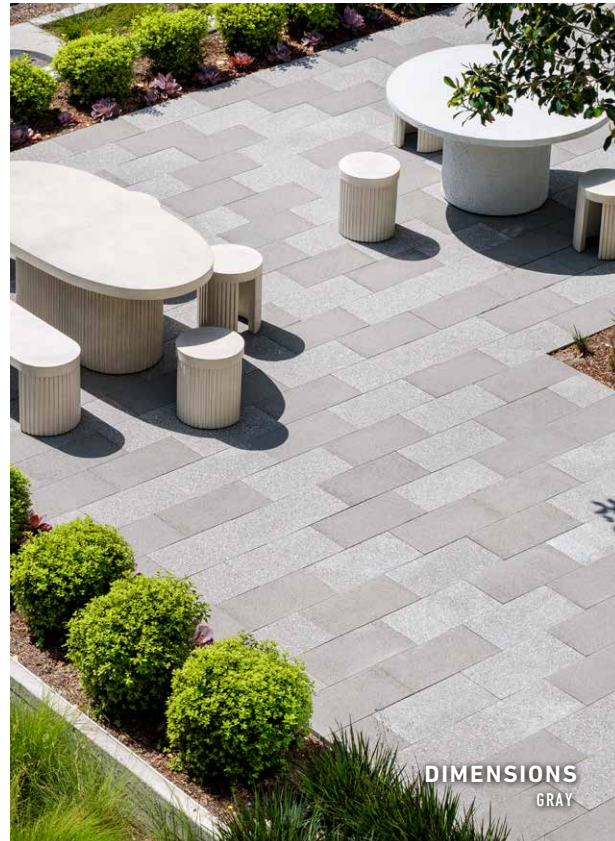

DIMENSIONS
GRAY




HEXAGON
CHARCOAL & WHITE

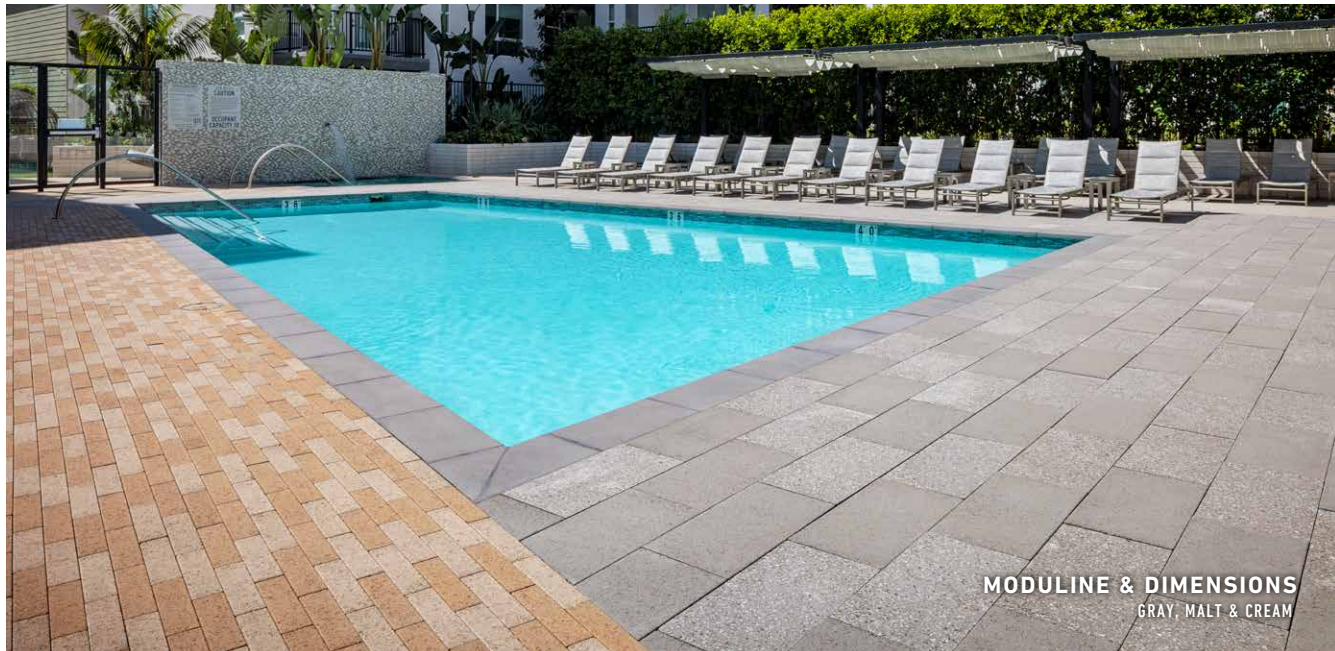

MODULINE & DIMENSIONS
GRAY, MALT & CREAM



DIMENSIONS
CHARCOAL, GREY & WHITE

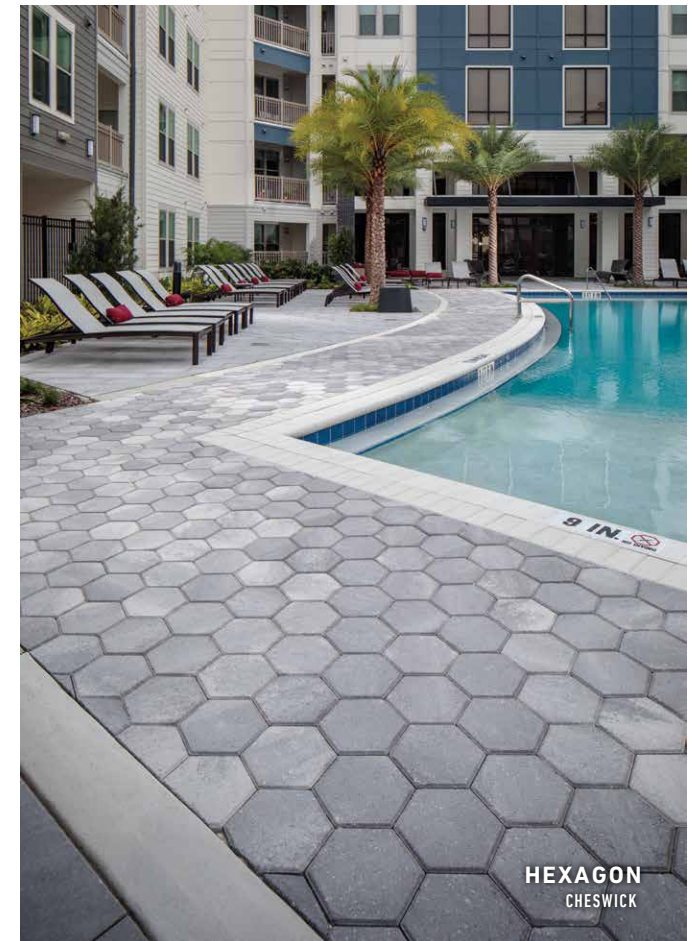

HEXAGON
CHESWICK

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

** Pallet information varies by manufacturer. Contact your Belgard Representative for more information.

Vehicular & Architectural Pavers (Continued)






UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Antiqued		
 Appian-Stone®	60 mm	6" x 9"	60 mm				✓		✓		Rolled edge	103
 Appian-Stone® 2-Piece	30 mm 60 mm 80 mm	6" x 6" 6" x 9"	30 mm 60 mm	80 mm	80 mm	80 mm	✓		✓		Rolled edge	124 (30 mm) 103 (60 mm) 82 (80 mm)
 Belgian Cobble®	70 mm	Various	70 mm	70 mm					✓	✓	N/A	98
 Catalina™	30 mm 60 mm 80 mm	4" x 8" 8" x 8" 8" x 12"	30 mm 60 mm 80 mm	80 mm			✓			✓	3 mm	103 (30 mm) 103 (60 mm) 82 (80 mm)
 Catalina Grana®	30 mm 60 mm 80 mm	4" x 8" 8" x 8" 8" x 12"	30 mm 60 mm 80 mm	80 mm			✓		✓		3 mm	103 (30 mm) 103 (60 mm) XX (80 mm)
 NEW Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm							✓	Rolled edge	105
 NEW Empire™ <i>Various face styles sold on one pallet</i>	60 mm 80 mm	3" x 12"	60 mm	80 mm			✓			✓	3 mm	110 XX (80 mm)
 Holland Stone	30 mm 60 mm 80 mm 101.6 mm	4" x 8"	30 mm 60 mm 80 mm 101.6 mm	80 mm 101.6 mm	80 mm 101.6 mm	80 mm 101.6 mm	✓	80 mm	✓	✓	7 mm	145 (30 mm) ** (60 mm) ** (80 mm) 80 (101 mm)
 Mega-Cambridge™	30 mm 60 mm 80 mm	6" x 9" 9" x 9" 9" x 12"	30 mm 60 mm 80 mm	80 mm					✓		Rolled edge	136 (30 mm) 114 (60 mm) 92 (80 mm)
 Melville™ Plank	60 mm	5" x 11 ³ / ₁₆ " 5" x 15 ³ / ₄ " 5" x 19 ¹ / ₁₆ "	60 mm				✓		✓		3 mm	98
 Origins™ 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm				✓			✓	3 mm	120
 Origins™ 18	60 mm	9" x 18" 18" x 18" 18" x 27"	60 mm				✓			✓	3 mm	112.5

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.





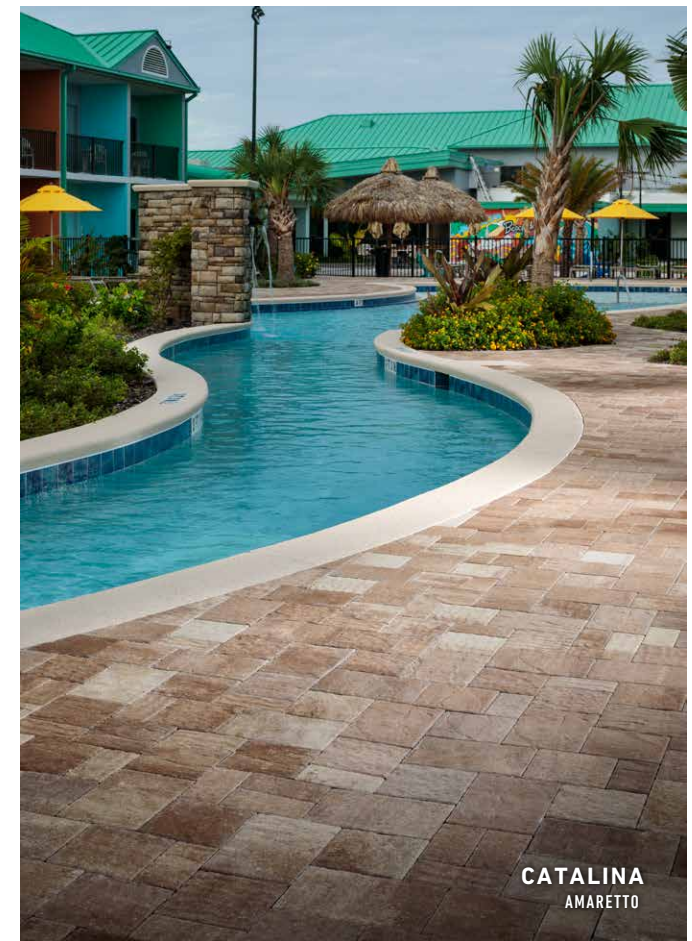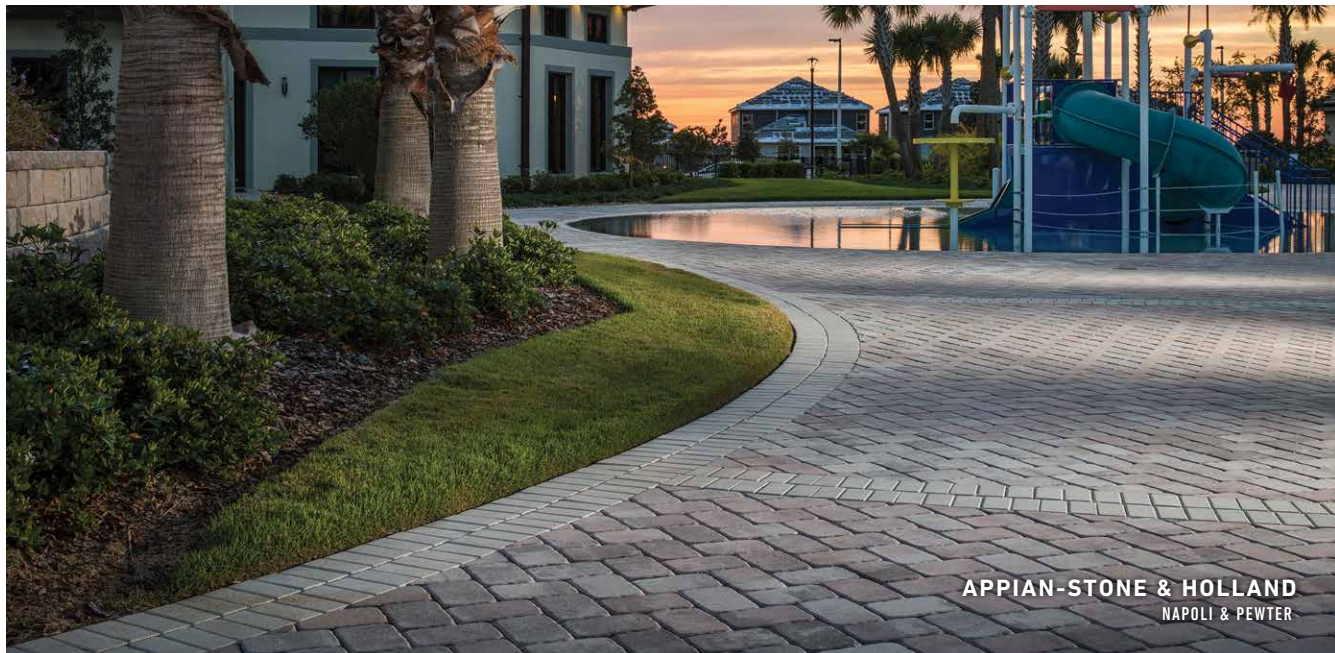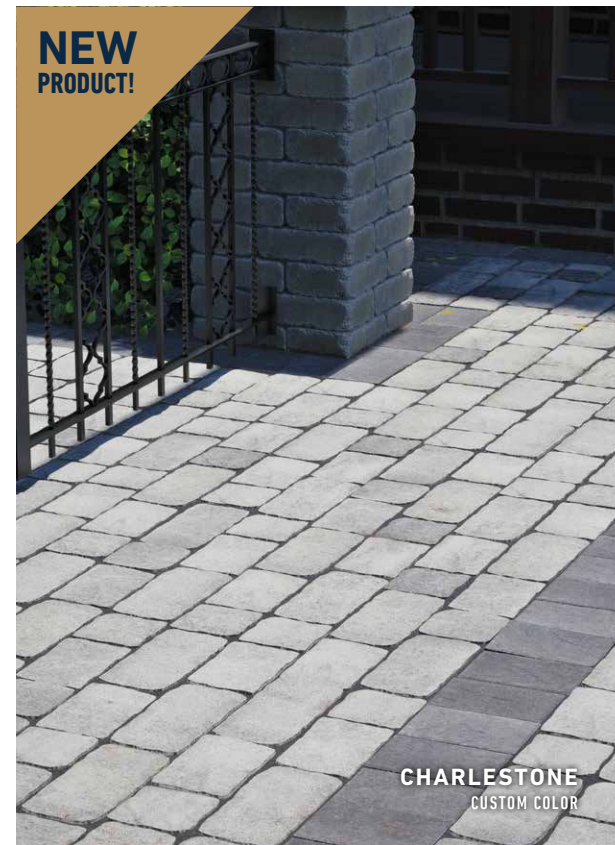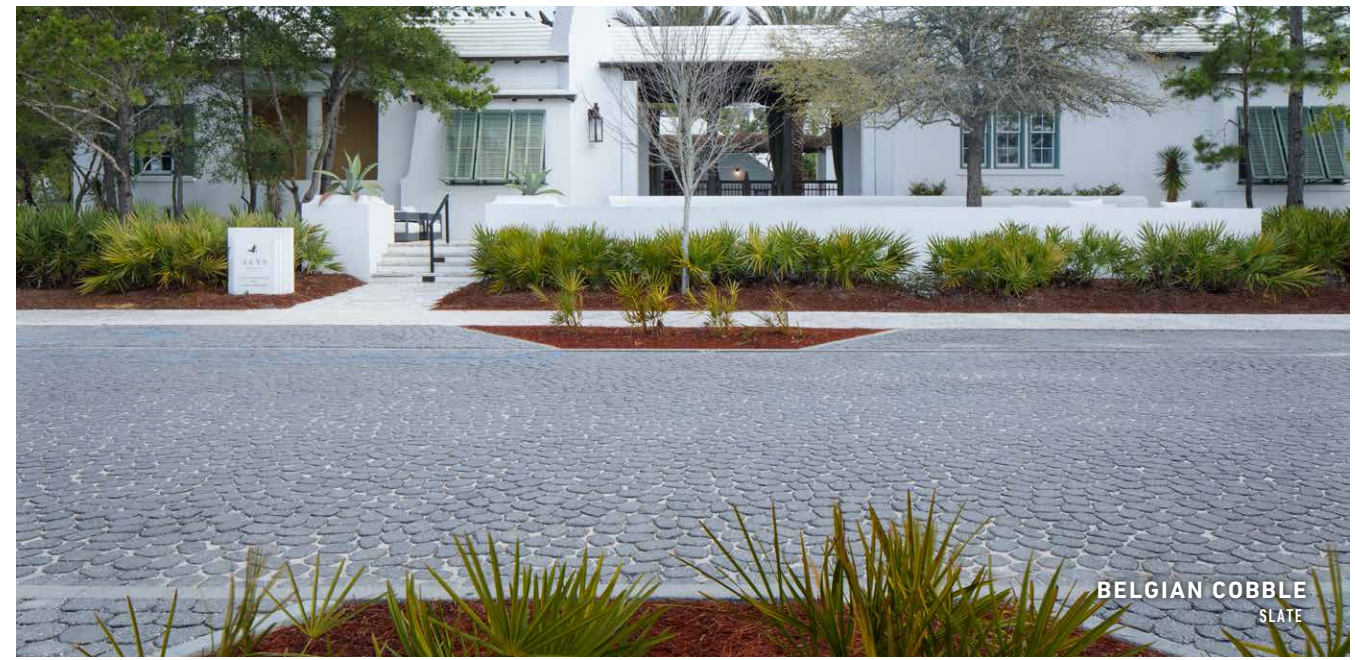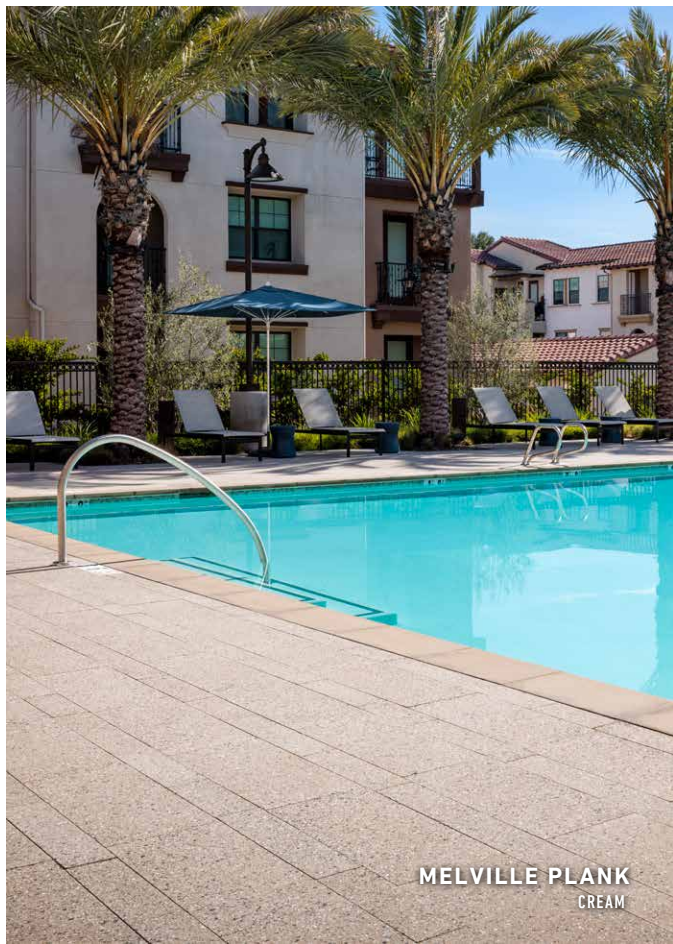



Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.








** Pallet information varies by manufacturer. Contact your Belgard Representative for more information.



Permeable Pavers




UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Ground Face	Antiqued				
 Aqualine™ 3-Piece Ashlar	80 mm	4½" x 9" 4½" x 4½" 9" x 9"	✓	✓	✓	✓	✓	✓	✓			10 mm	12%	3 mm	90
 Aqualine™	80 mm	4½" x 9"	✓	✓	✓	✓	✓	✓	✓			10 mm	10%	3 mm	90

Concrete Grid Pavements

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	MECHANICAL INSTALL	FINISHES			% SURFACE OPENING	SQ. FT. PER PALLET
									Standard	Ground Face	Antiqued		
 Turfstone™	80 mm	15¾" x 23¾"	✓					✓	✓			40%	Varies by Location

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

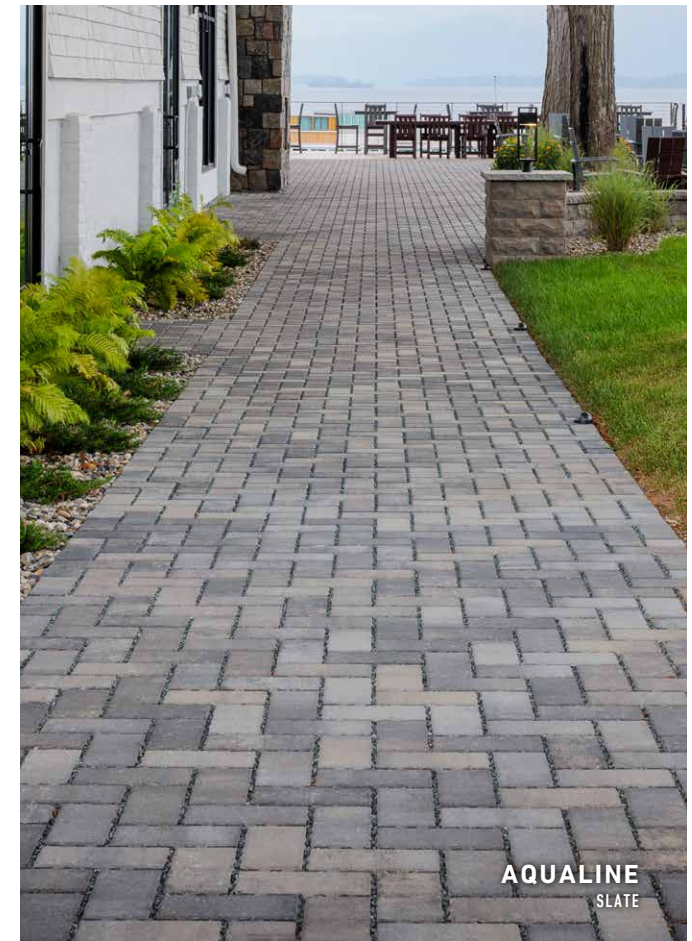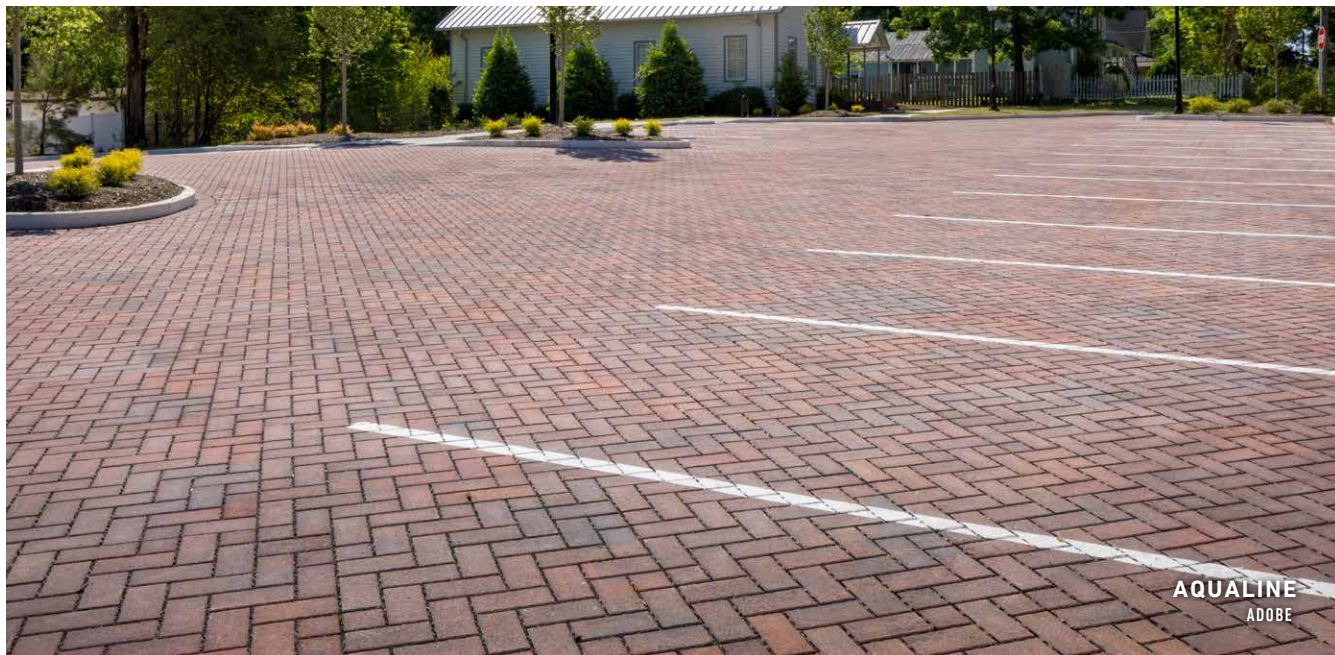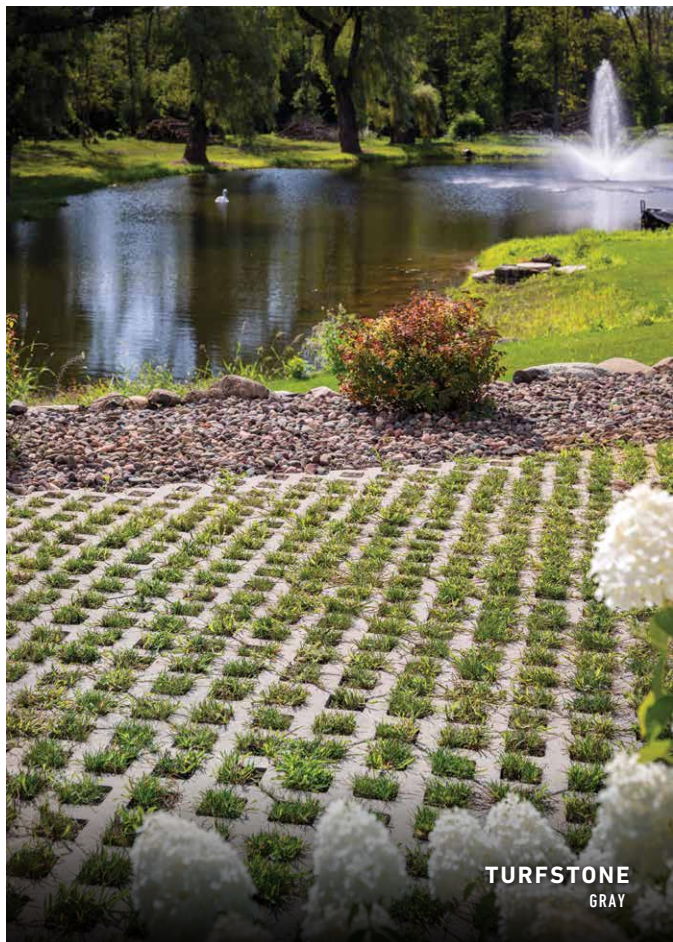

Porcelain Pavers

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									
 Dijon	Stone	¾"	24" x 24"	Couches, Commarin, Rochepot, Bazoches	✓	✓	232.5	-	-
 Dijon	Stone	¾"	24" x 36"	Couches, Commarin, Rochepot, Bazoches	✓	✓	279	-	-
 Dijon	Stone	¾"	24" x 48"	Couches, Commarin, Rochepot, Bazoches	✓	✓	271.25	-	-
 Genoa	Stone	¾"	12" x 24"	Blanco, Crema	✓	✓	232.5	120	2,201
 Genoa	Stone	¾"	24" x 24"	Blanco, Crema	✓	✓	232.5	60	2,160
 Glocal	Concrete	¾"	24" x 24"	Clear, Ideal, Type, Classic, Absolute, Chamois	✓	✓	232.5	60	2,160
 Glocal	Concrete	¾"	24" x 48"	Ideal, Type, Classic, Absolute, Chamois	✓	✓	271.25	35	2,621
 Glocal	Concrete	¾"	48" x 48"	Ideal, Absolute	✓	✓	310	20	3,009
 Glocal	Concrete	¾"	32" x 32"	Ideal, Type, Classic, Absolute, Chamois	✓	✓	289.3	42	2,751
 Jurupa	Wood	¾"	12" x 48"	Cool, Master, Camp	✓	✓	279	72	2,664
 Kao	Wood	¾"	12" x 48"	Hazelnut, Hazelnut Raw, Caramel, Caramel Raw, Spice, Spice Raw	✓	✓	235.5	-	-
 Lagoon	Stone	¾"	24" x 48"	Moonbeam, Sandshell, Sharkskin	✓	✓	271.25	35	2,621
 Na.Me	Stone	¾"	18" x 36"	Jura Beige, Bourgogne, Gris Belge	✓	✓	234.9	54	2,235
 Na.Me	Stone	¾"	24" x 24"	Jura Beige, Bourgogne, Gris Belge	✓	✓	232.5	60	2,160
 Na.Me	Stone	¾"	24" x 48"	Jura Beige, Bourgogne, Gris Belge	✓	✓	271.25	35	2,621
 Nau	Wood	¾"	12" x 48"	Fado, Indie	✓	✓	279	72	2,664

Porcelain Pavers (Continued)

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									
 Noon	Wood	¾"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,664
 Norr	Stone	¾"	24" x 24"	Vit, Gra, Svart, Farge, Hav, Oken, Grus	✓	✓	232.5	60	2,160
 Norr	Stone	¾"	32" x 32"	Vit, Gra, Svart, Farge, Hav, Oken, Grus	✓	✓	289.3	42	2,751
 Norr	Stone	¾"	24" x 48"	Vit, Gra, Svart, Farge	✓	✓	279	-	-
 Norr	Stone	¾"	48" x 48"	Vit, Gra, Svart, Farge	✓	✓	310	-	-
 November	Stone	¾"	24" x 24"	Rain, Wind, Warm, Land	✓	✓	232.5	60	2,160
 Oudh	Wood	¾"	12" x 48"	Copahu, Elem, Jinkoh, Pino, Laos, Ladano, Cedro	✓	✓	235.5	-	-
 Quarziti 2.0	Stone	¾"	12" x 24"	Glacier, Mountains, Waterfall, River, Mantle	✓	✓	232.5	120	2,201
 Quarziti 2.0	Stone	¾"	18" x 36"	Glacier, Mountains, Waterfall, River, Mantle	✓	✓	234.9	54	2,235
 Quarziti 2.0	Stone	¾"	24" x 24"	Glacier, Mountains, Waterfall, River, Mantle	✓	✓	232.5	60	2,160
 Quarziti 2.0	Stone	¾"	24" x 48"	Glacier, Mountains, Waterfall, River, Mantle	✓	✓	271.25	35	2,621
 Quarziti Modular (2 pc)	Stone	¾"	12" x 24" 24" x 36"	Mountains, Waterfall, Mantle	✓	✓	279	72	2,640
 Silverlake	Stone	¾"	24" x 48"	Braies, Resia, Orsi	✓	✓	271.25	35	2,621
 Travertini	Travertine	¾"	24" x 24"	Pearly Cross, Light Cross, Misty Cross, Rustic Cross	✓	✓	232.5	60	2,160
 Travertini	Travertine	¾"	32" x 32"	Pearly Cross, Light Cross, Misty Cross, Rustic Cross	✓	✓	289.3	42	2,751
 Travertini	Travertine	¾"	24" x 48"	Pearly Cross, Light Cross, Misty Cross, Rustic Cross, Light Vein, Dark Vein, Misty Vein	✓	✓	271.25	35	2,621
 Unico 2.0	Stone	¾"	12" x 24"	Available in all Glocal, Noon, Quarziti 2.0 & Travertini Colors	✓	✓	205.2 LN FT	108	1,944



NOVEMBER
LAND




QUARZITI 2.0
RIVER, WATERFALL & GLACIER




TRAVERTINI
PEARLY CROSS



GLOCAL
PERFECT

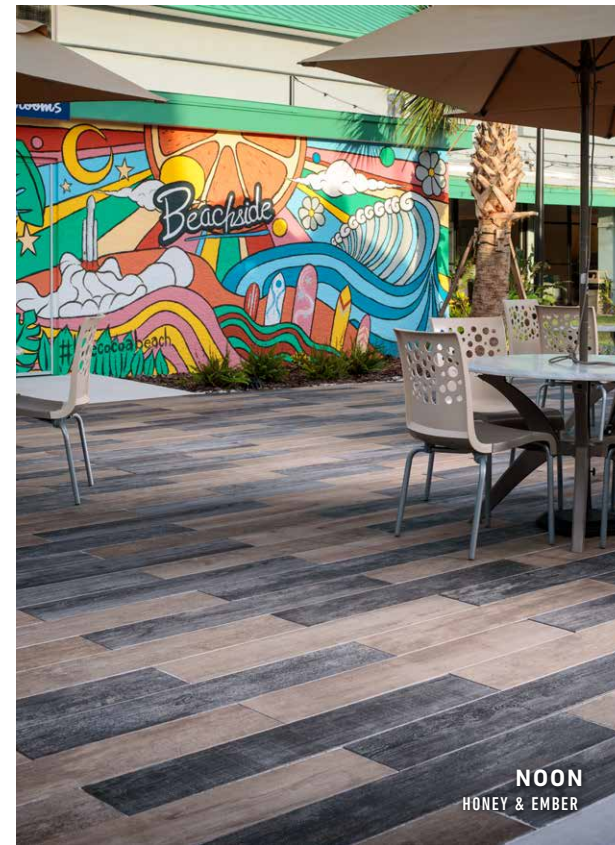



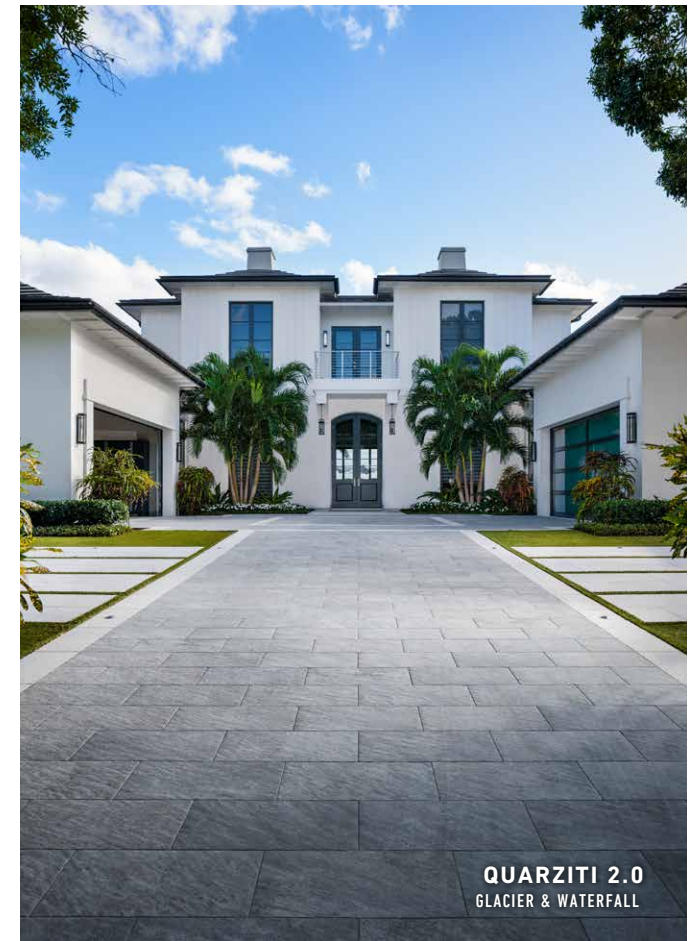











NOON
HONEY & EMBER



QUARZITI 2.0
GLACIER & WATERFALL

Segmental Retaining and Freestanding Walls (SRW & FSW)

UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES					BATTER	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Beveled	Virtual Joint	Victorian	Stone Cut		
 Castlemanor®	6"	6", 12", 16" <i>(long side dimension)</i>	10"		Fiberglass Pins					✓	✓					0° and 9.5°	31
 Castlemanor® Grana	6"	6", 12", 16" <i>(long side dimension)</i>	10"		Fiberglass Pins						✓					0° and 9.5°	31
 Belair Wall® 2.0 Freestanding Wall	6"	6", 10", 16"	5"			✓		✓								Vertical	30
 Belair Wall® 2.0 Retaining Wall	6"	6", 10", 16"	8"	Rear Lip		✓		✓								9.5°	30
 Diamond Pro® Air Smooth Face	8"	18"	11½"	Lugs		✓										4°	36
 Diamond Pro® Air Straight Face	8"	18"	11½"	Lugs		✓					✓					4°	36
 Diamond Pro® Smooth Face	8"	18"	12"	Rear Lip		✓					✓					7.1°	48 units per pallet
 Diamond Pro® Straight Face	8"	18"	12"	Rear Lip		✓			✓		✓					7.1°	48 units per pallet
 Diamond Pro® PS	8"	18"	12"		Fiberglass Pins	✓			✓		✓**			✓ <i>(special order)</i>		1.7°, 7.1°	48 units per pallet
 Easton Stone™	4"	8/5" 12/9" 16/13"	8"								✓					Vertical	42
 NEW Melville™ Wall	4"	20"	10"								✓					Vertical	48 units per pallet
 Torpedo Base Block®	4"	15¾"	11"													N/A	48 units per pallet
 Weston Stone™	4"	8/5" 12/9" 16/13"	8"							✓	✓					Vertical	42
 Weston Stone™ Universal	4"	12"	8"							✓	✓					Vertical	40

* Sold separately: all walls have available cap options. Contact your representative for more information.

** Straight II Face




BELAIR WALL 2.0
CUSTOM COLOR




WESTON STONE
AMARETTO



MELVILLE WALL
SLATE

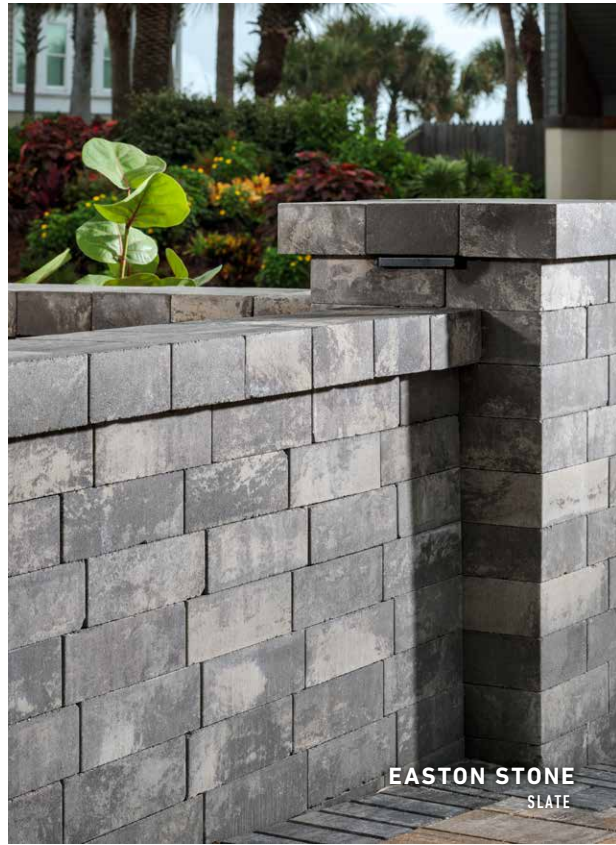


EASTON STONE
SLATE

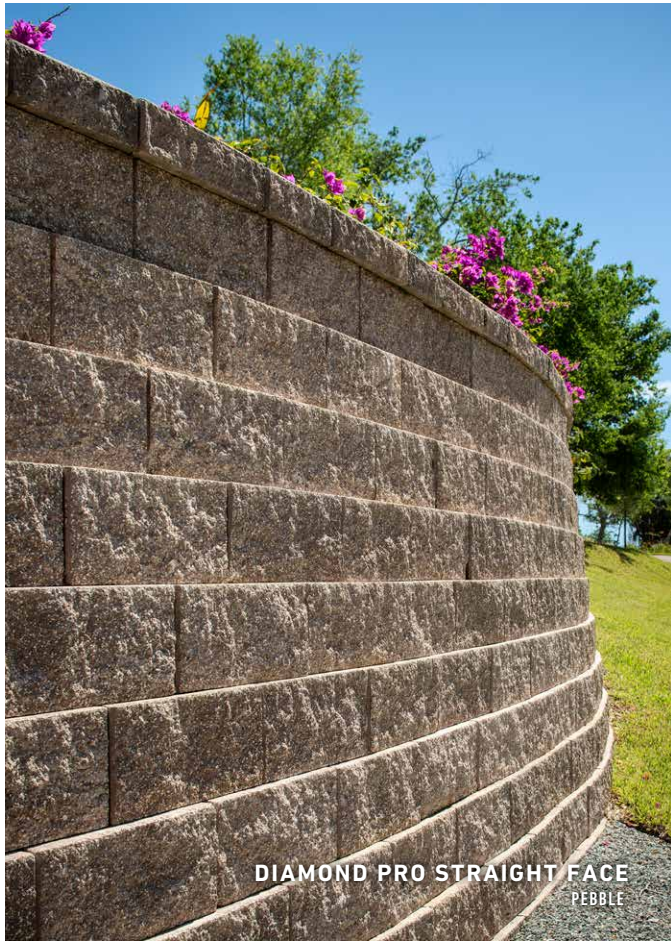


DIAMOND PRO STRAIGHT FACE
PEBBLE



CASTLEMANOR
NAPOLI

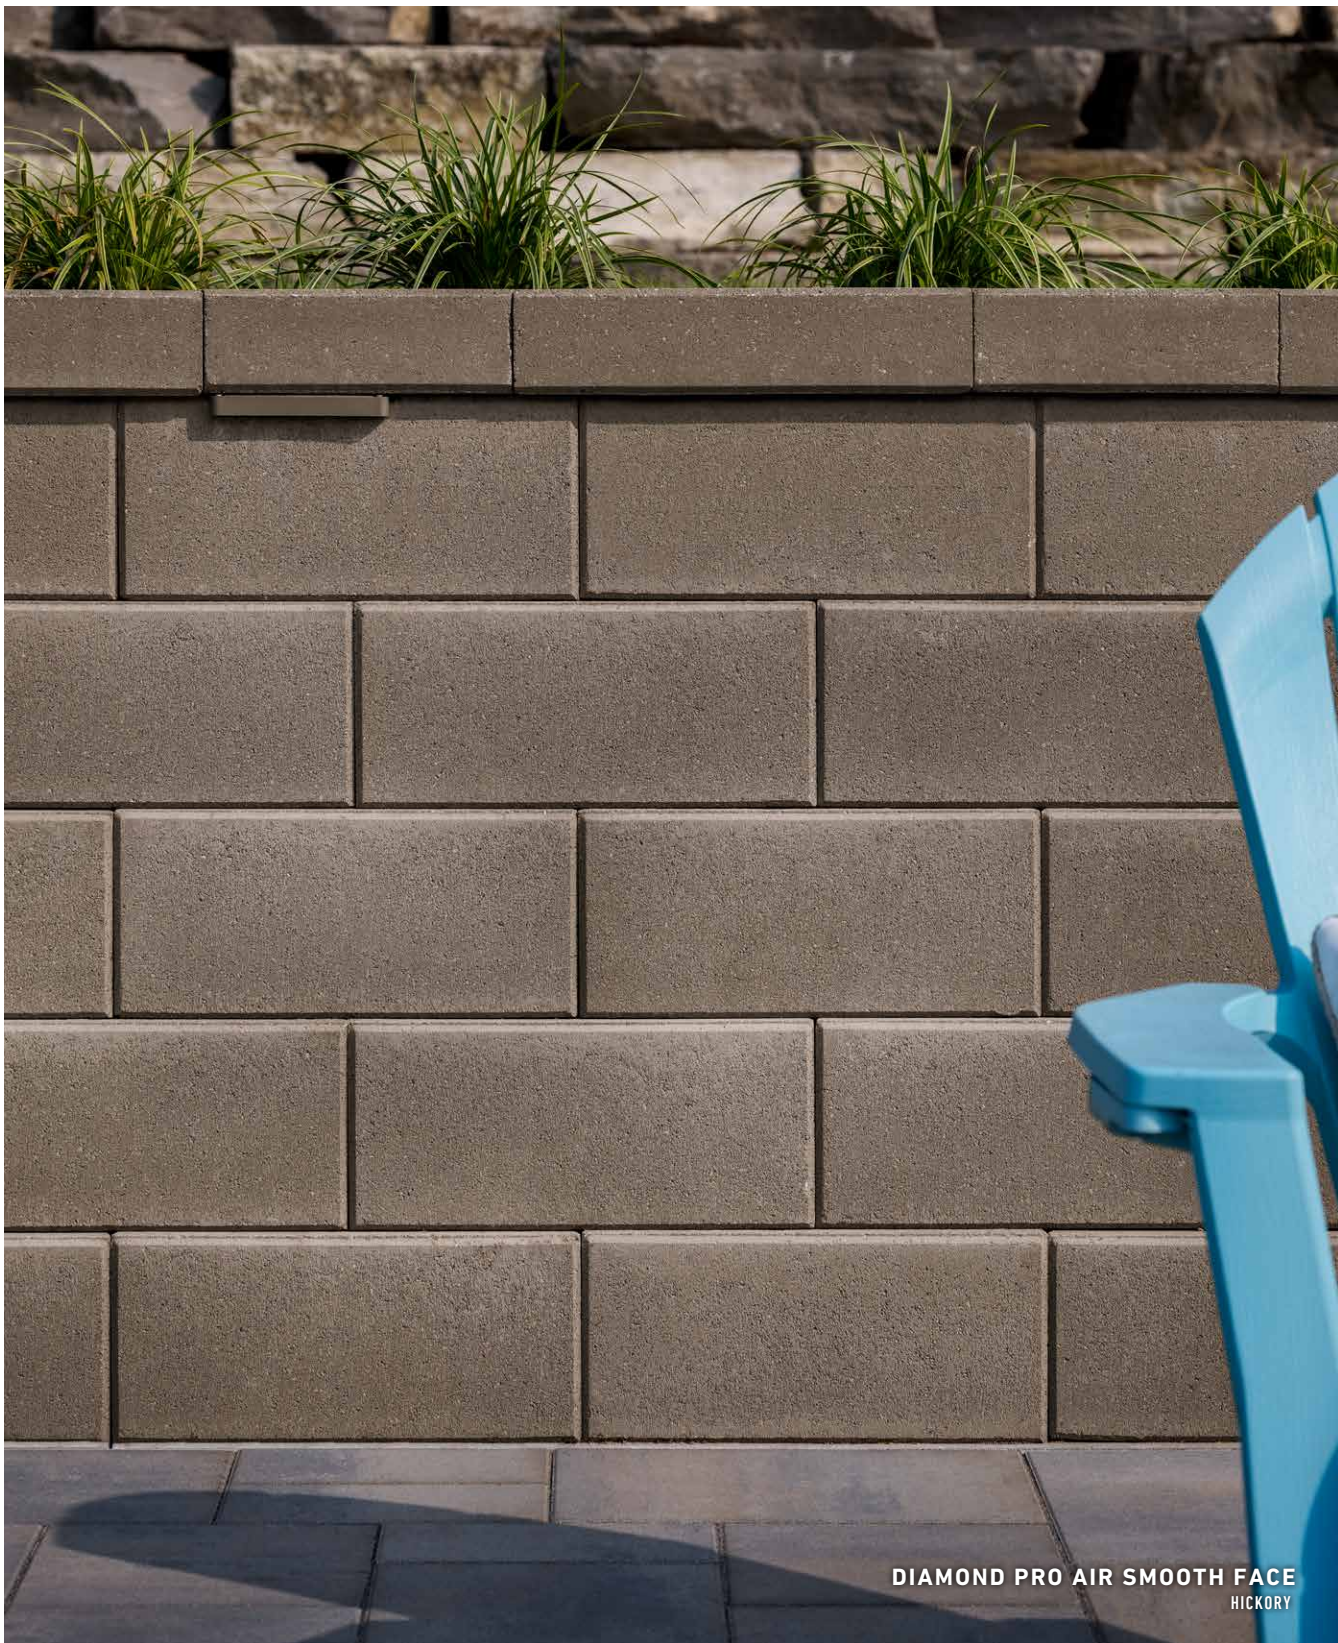

DIAMOND PRO AIR SMOOTH FACE
HICKORY

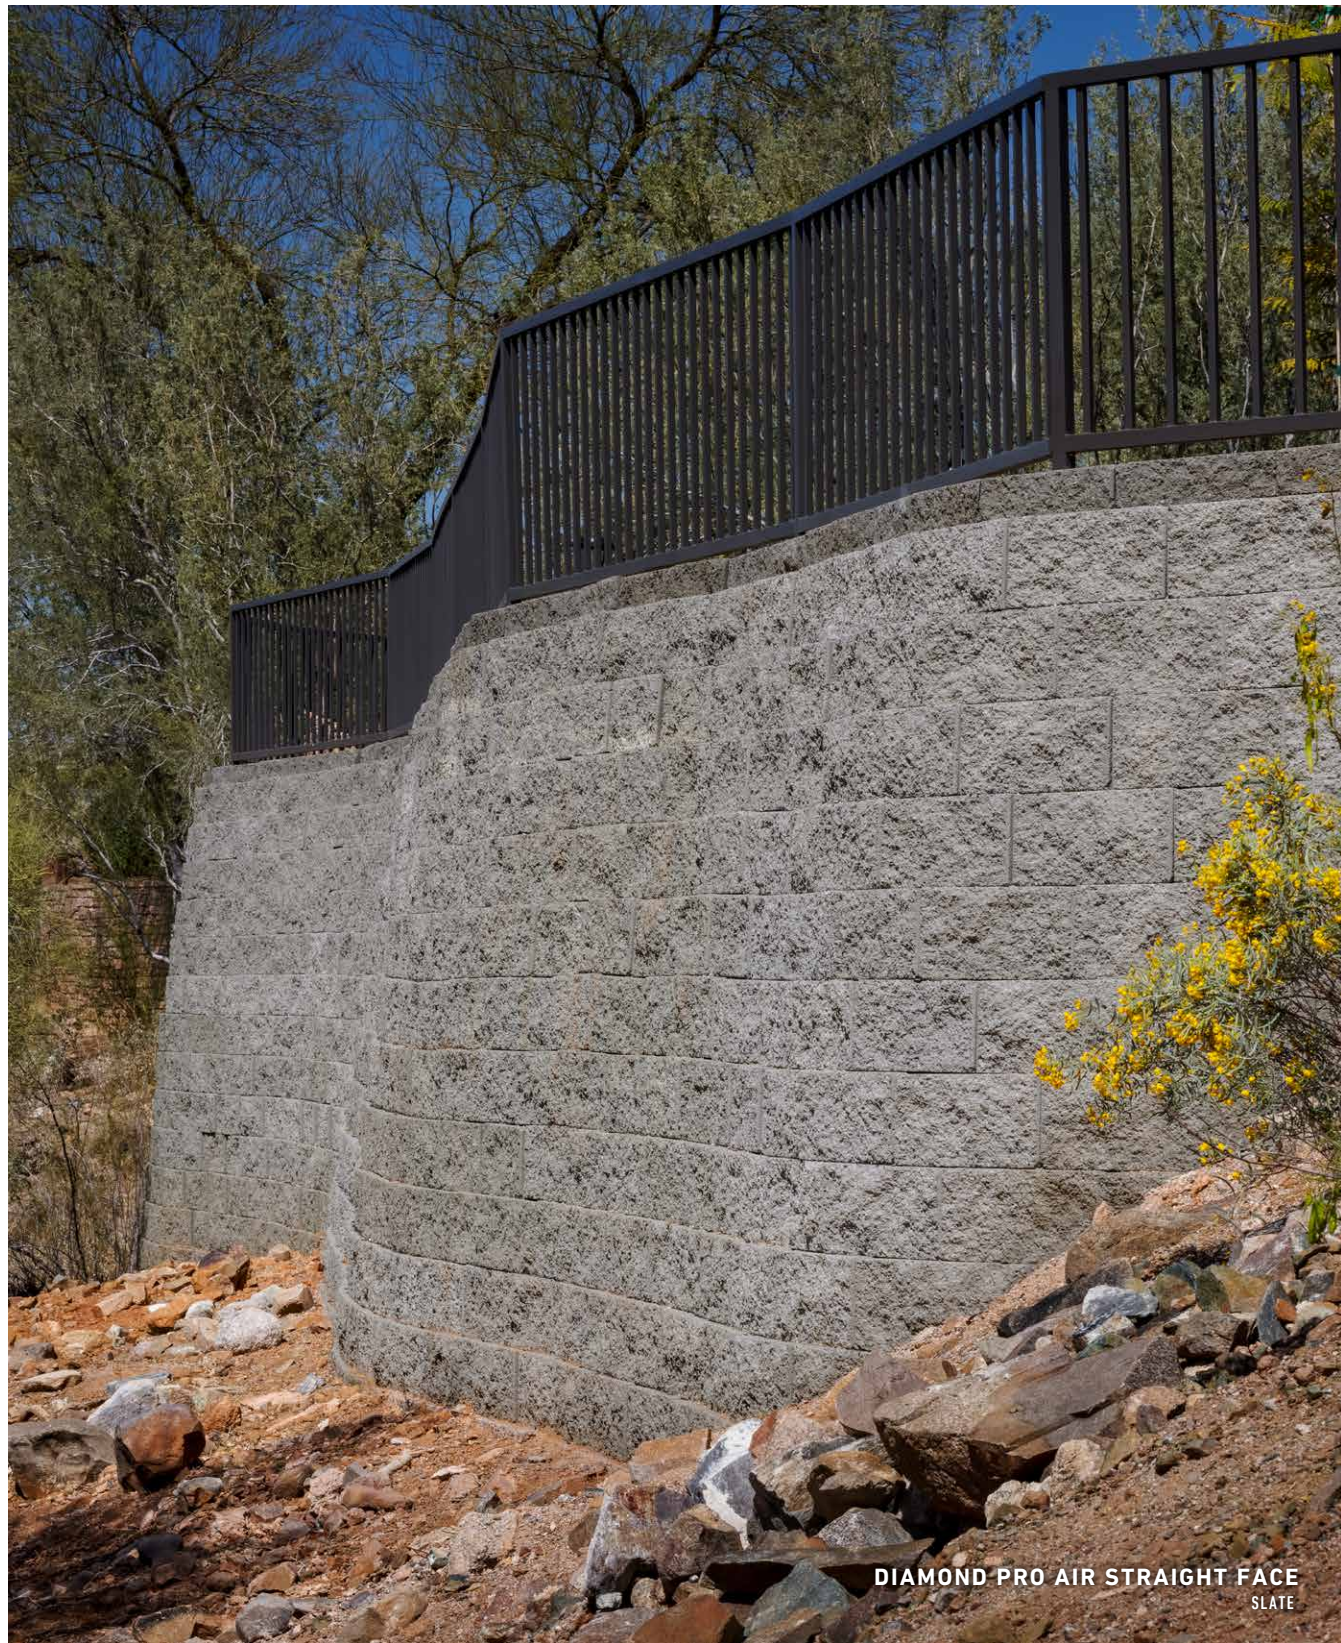



DIAMOND PRO AIR STRAIGHT FACE
SLATE

Artforms™ Modular Panel System



9 DESIGN IDEAS USING ONLY 2 PALLETS*

Two modular panel sizes can create a myriad of outdoor living solutions, offering quicker install without sacrificing style.



Artforms simplifies the design of contemporary outdoor living spaces. This unique modular panel system offers sleek lines and rich color blends to create eye-catching outdoor kitchens and limitless outdoor living features.



MIDNIGHT
Only available in 6 x 36



SCANDINA GRAY



Professional Support



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



Oldcastle[®]APG
ACRH COMPANY

5959 Soutel Drive
Jacksonville, FL 32219
Ph: 904-713-9996
Fx: 904-713-9985

39 West Landstreet Road
Orlando, FL 32824
Ph: 800-226-9117
Fx: 407-851-9316

2200 12 Street
Sarasota, FL 34237
Ph: 941-957-3933
Fx: 941-366-1343

8910 North 12 Street
Tampa, FL 33604
Ph: 800-356-7283
Fx: 813-933-4914

7167 Interpace
West Palm Beach, FL 33407
Ph: 800-226-0004
Fx: 561-844-5454

3302 NE 2 Street
Gainesville, FL 32609
Ph: 352-377-1699
Fx: 352-377-2604

421 Leonard Blvd N
Lehigh Acres, FL 33971
Ph: 239-368-9700

325 North Street
Longwood, FL 32750
Ph: 407-831-1050
Fx: 407-331-6150

5603 Anderson Road
Tampa, FL 33614
Ph: 813-886-7761
Fx: 813-886-8822

2902 Warehouse Road
Ft. Myers, FL 33916
Ph: 239-334-8022
Fx: 239-334-0870

3749 Copeland Drive
Zephyrhills, FL 33542
Ph: 813-783-1970
Fx: 813-783-2728

1980 Marley Drive
Haines City, FL 33844
Ph: 863-421-7422
Fx: 863-421-1250

1590 North Andrews Ave Ext
Pompano Beach, FL 33069
Ph: 954-972-7400
Fx: 855-265-5169

28 Gene Hurley Road
De Funiak Springs, FL 32435
Ph: 850-892-5155
Fx: 850-892-7247

3019 S US Hwy 1
Fort Pierce, FL 34982
Ph: 772-429-1124

Showrooms (by appointment only)

4630 Shirley Street
Naples, FL 34109
Ph: 239-633-2596

2874 NW 79 Ave
Doral, FL 33122
Ph: 305-216-0947

11657 Phillips Hwy
Jacksonville, FL 32256
Ph: 877-924-2766

Sales Representatives

James Bellamy
Ph: 615.714.1456
james.bellamy@oldcastle.com

Mike Jeffreys
Ph: 561.631.1192
mike.jeffreys@oldcastle.com

8" HEXAGON, HOLLAND STONE & DIMENSIONS
GRANITE, WHITE & PEWTER



BELGARD
COMMERCIAL

AN OLDCASTLE APG® OUTDOOR BRAND

BELGARDCOMMERCIAL.COM

©2025 Oldcastle APG, Inc. All Rights Reserved. BELCOMM25-D-405500