

COMMERCIAL

PRODUCT OFFERING

WEST

COLORADO, IDAHO, UTAH & WYOMING



BELGARD
COMMERCIAL

PAVER APPLICATIONS



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

PAVER COLORS & FINISHES

Finishes

Manufacturing processes generate various finishes that are distinctive and can create the exact look you desire for your project. All processes are not available in all locations. Check with your local Belgard Sales Representative for more information.



Standard (smooth)

Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Antiqued

Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



Shot Blast *(special order)*

Exposes the surface of the paving unit to reveal the natural beauty of the aggregates and pigmentation.



Ground Face *(special order)*

The top of the paving units are ground smooth which exposes the aggregate colors and pigmented background.



DuraFusion™

DuraFusion fuses a top layer of rich pigments with Belgard's core color process. The result is a paver with a richness and purity of color that's sleek and vibrant.

BELGARD PAVER COLORS & FINISHES



SMOOTH SHOT BLAST GROUND FACE


Belgard Commercial allows you to customize your project with optional finishes: Smooth, Shot Blast and Ground face. Contact your Belgard Commercial Representative for more information.

Contact your Belgard Representative for custom finish options and sample products, as well as ADA Compliant products.



DESERT

Smooth Shot Blast Ground Face

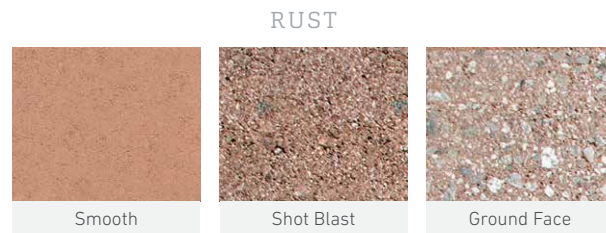


RUST

Smooth Shot Blast Ground Face



DESERT SAND

Smooth Shot Blast Ground Face

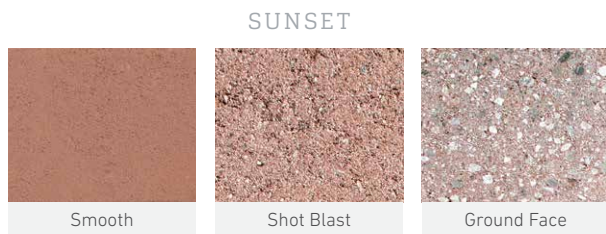


SUNSET

Smooth Shot Blast Ground Face




BURNT UMBER

Smooth Shot Blast Ground Face

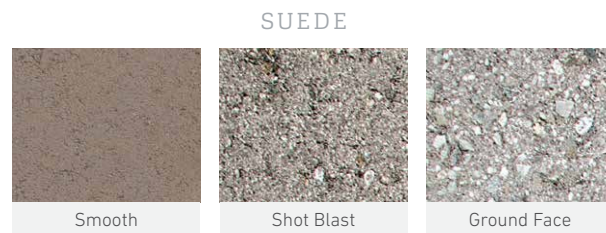


SUEDE

Smooth Shot Blast Ground Face

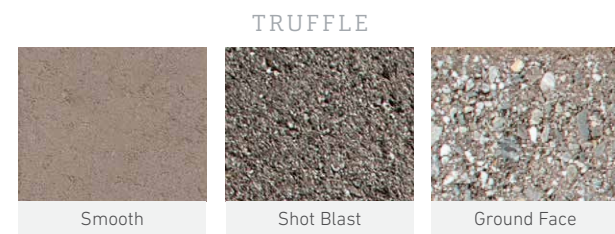

TRUFFLE

Smooth Shot Blast Ground Face

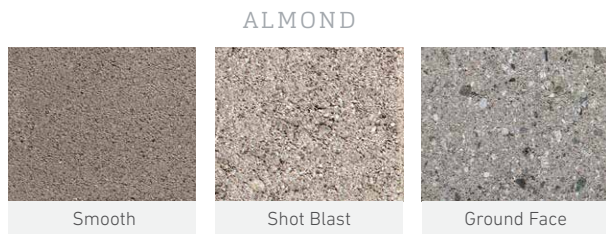


ALMOND

Smooth Shot Blast Ground Face



MONSOON GREY

Smooth Shot Blast Ground Face

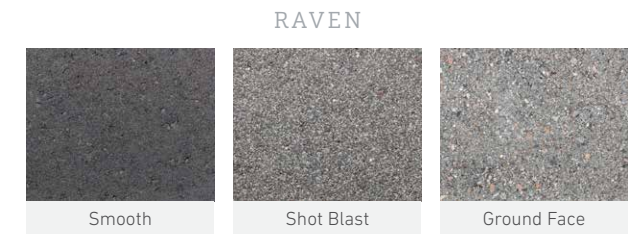


RAVEN

Smooth Shot Blast Ground Face



GRAPHITE

Smooth Shot Blast Ground Face

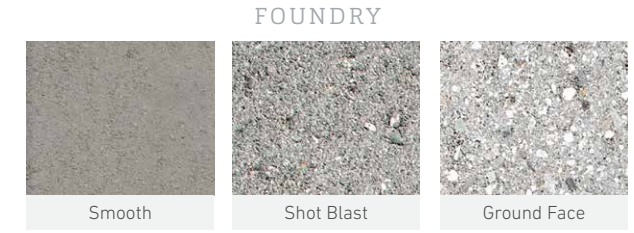

FOUNDRY

Smooth Shot Blast Ground Face




GREY MIST

Smooth Shot Blast Ground Face



TONOPAH WHITE

Smooth Shot Blast Ground Face

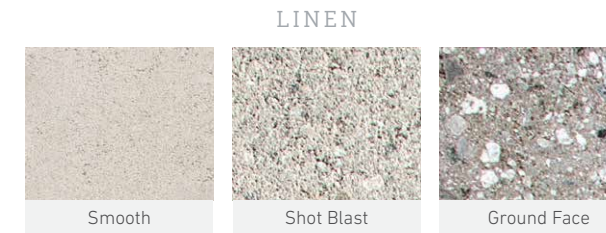













LINEN



Smooth Shot Blast Ground Face

BLENDED COLORS



MODULINE SERIES® VEHICULAR & ARCHITECTURAL PAVERS



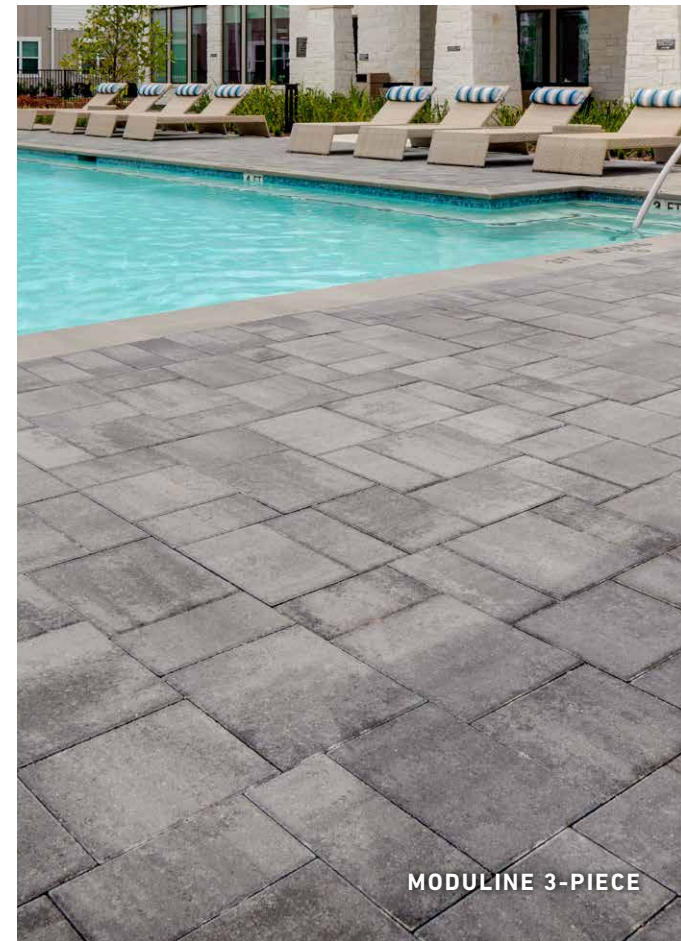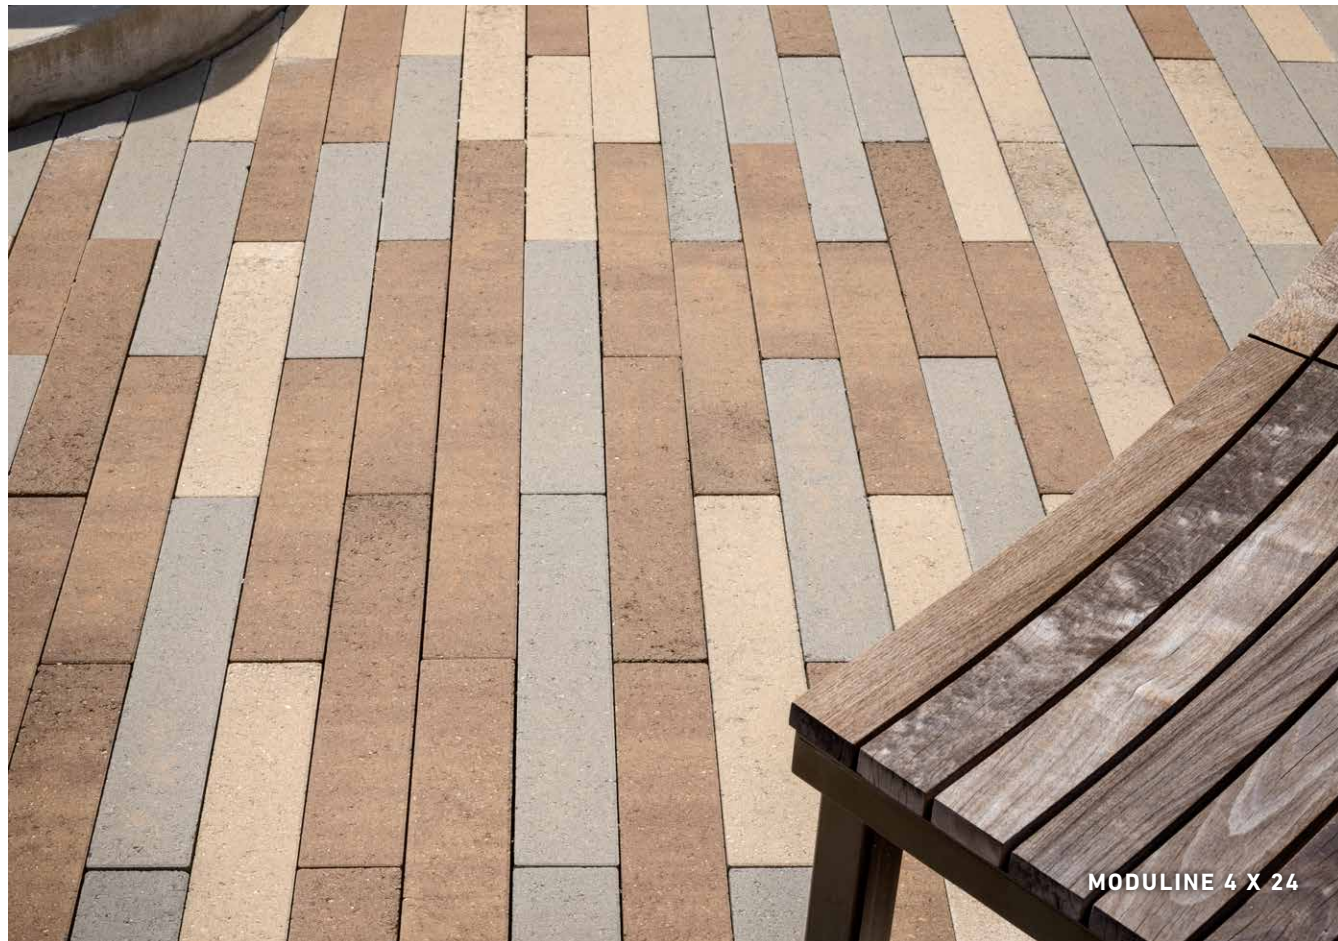



















UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	MECHANICAL INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Ground Face	Shot Blast	Antiqued		
 4" x 12"	80 mm	4" x 12"	80 mm	80mm			✓		✓	✓	✓		3 mm	85
 4" x 18"	80 mm	4" x 18"	80 mm				✓		✓	✓	✓		3 mm	36
 4" x 24"	80 mm	4" x 24"	80 mm				✓		✓	✓	✓		3 mm	48
 4" x 30"	80 mm	4" x 30"	80 mm				✓		✓	✓	✓		3 mm	53.33
 6" Bishop Hat	60 mm 80 mm 101.6 mm	6" Bishop Hat	60 mm	80 mm	80 mm	80 mm 101.6 mm	✓		✓	✓	✓	✓	3 mm	84.5 (60 mm) 67.6 (80 mm) 50.7 (101.6 mm)
 3-Piece Modular	80 mm	6" x 6", 6" x 12", 12" x 12"	80 mm	80 mm			✓		✓	✓	✓	✓	3 mm	96







* May be suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Note: The Moduline Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times. Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

DIMENSIONS™ SERIES VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET	
											Standard	Ground Face	Shot Blast			Antiqued
 Dimensions™ 18	60 mm	9" x 18" 18" x 18" 27" x 18"	60 mm					✓		✓				✓	3 mm	112.5
 Dimensions™ 12	60 mm 80 mm	6" x 12" 12" x 12" 12" x 18"	60 mm	80 mm				✓		✓				✓	3 mm	120 (60 mm) 96 (80 mm)
 Dimensions™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm					✓		✓					3 mm	120
 3" x 9"	60 mm	3" x 9"	60 mm					✓		✓					3 mm	103.13
 3" x 12" <i>(60 mm available in new Striated face style)</i>	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm			✓		✓	✓				3 mm	110 (60 mm) 88 (80 mm) 66 (101.6 mm)
 3" x 18"	101.6 mm	3" x 18"	101.6 mm					✓		✓	✓				3 mm	49.5
 3" x 24"	101.6 mm	3" x 24"	101.6 mm					✓		✓	✓				3 mm	66
 3" x 30"	101.6 mm	3" x 30"	101.6 mm					✓		✓	✓				3 mm	41.25
 6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm			✓		✓	✓	✓			3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm		✓		✓	✓	✓			3 mm	112 (60 mm) 90 (80 mm)
 6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm		✓		✓	✓	✓			3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 6" x 24"	101.6 mm	6" x 24"	101.6 mm					✓		✓	✓				3 mm	60
 9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80mm			✓		✓	✓	✓			3 mm	90
 12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm			✓		✓	✓	✓			3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
 12" x 12" ADA	60 mm	12" x 12"	60 mm					✓		✓					3 mm	120
 12" x 18"	60 mm	12" x 18"	60 mm					✓		✓	✓				3 mm	120
 12" x 24"	60 mm	12" x 24"	60 mm					✓		✓	✓				3 mm	120
 18" x 24"	60 mm	18" x 24"	60 mm					✓		✓	✓				3 mm	120
 24" x 24"	60 mm	24" x 24"	60 mm					✓		✓	✓				3 mm	80
 24" x 30"	60 mm	24" x 30"	60 mm					✓		✓	✓				3 mm	100
 24" x 36"	60 mm	24" x 36"	60 mm					✓						✓	3 mm	120

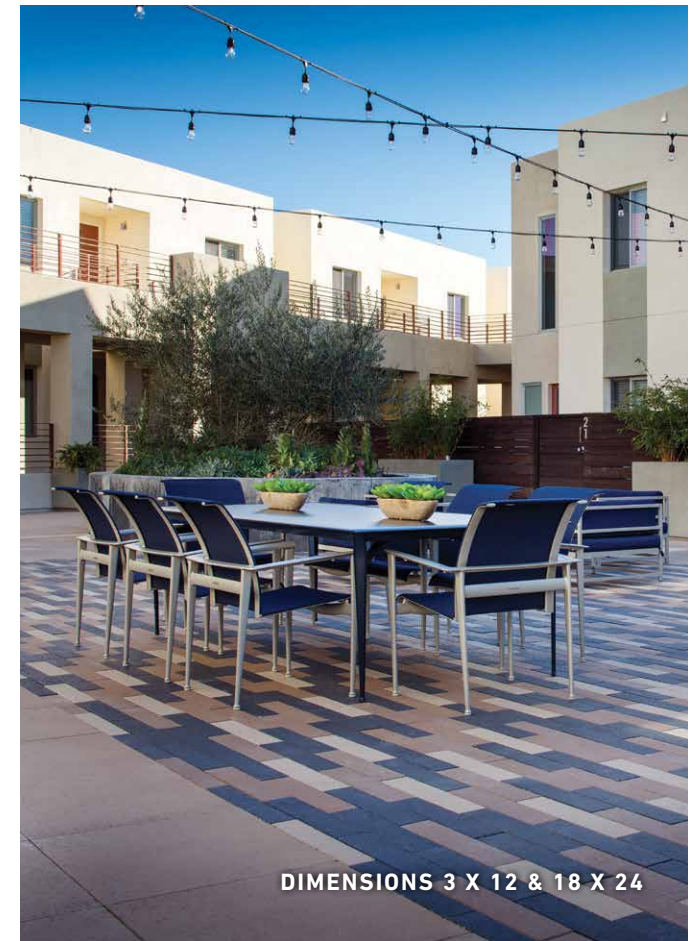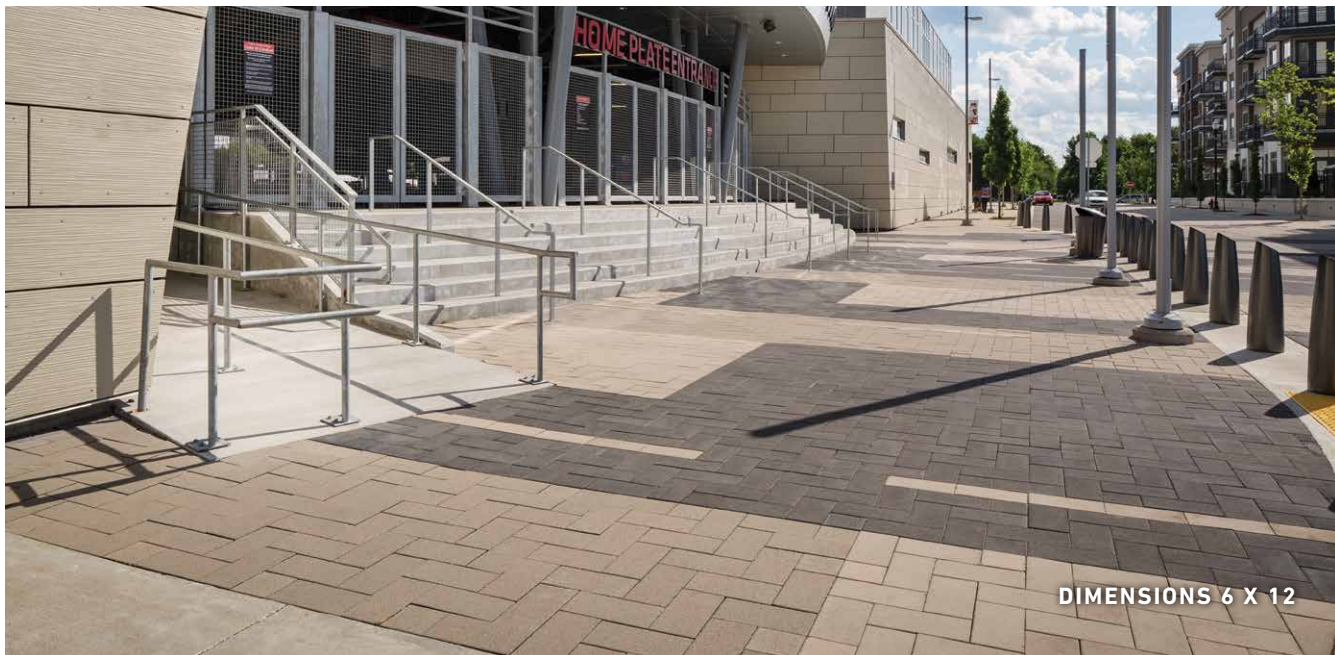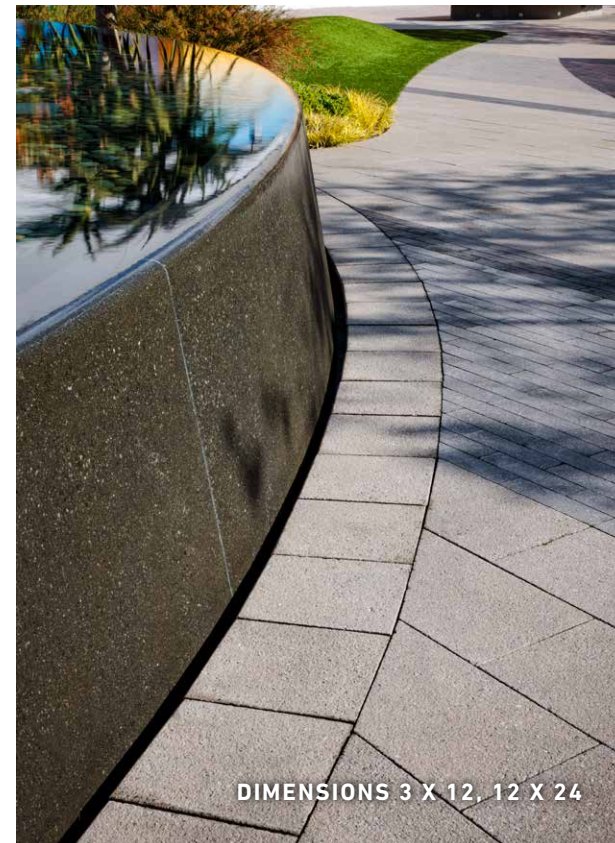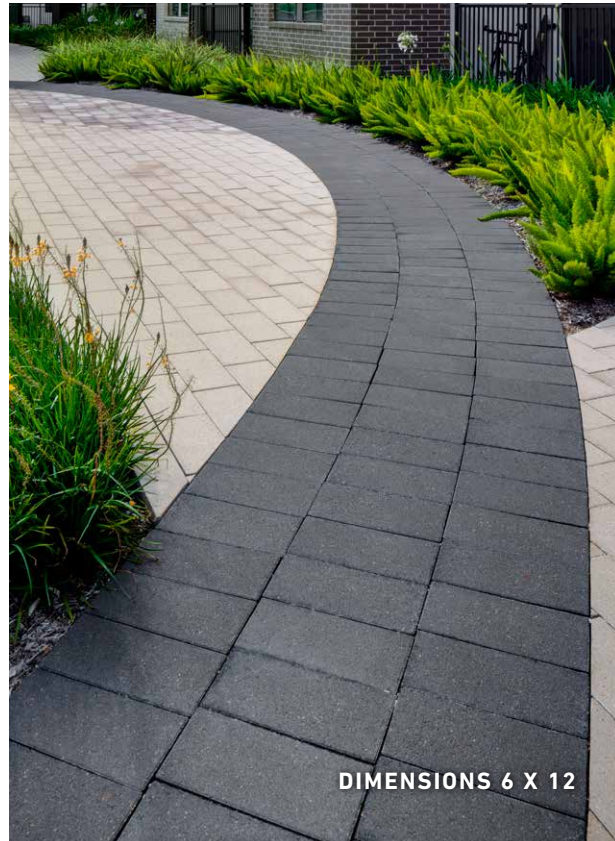

VEHICULAR & ARCHITECTURAL PAVERS (CONTINUED)

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET	
											Standard	Ground Face	Shot Blast			Antiqued
 Basalt™ 18 <i>(special order)</i>	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓						✓	3 mm	112.5
 Brooklyn™	60 mm	3" x 9"	60mm					✓						✓	N/A	103.13
 Cambridge Cobble® (Square)	60 mm 80 mm	6" x 6"	60 mm	80 mm <i>(special order)</i>	80 mm <i>(special order)</i>					✓			<i>special order</i>		rounded	120 (60 mm) 96 (80 mm)
 Cambridge Cobble® (Rectangle)	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm				✓			<i>special order</i>		rounded	112 (60 mm) 90 (80 mm)
 Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm							✓					Rolled Edge	105
 Dublin Cobble®	60 mm	6" x 3", 6" x 6", 6" x 9"	60 mm							✓			✓		varies between 2 and 5 mm	114
 Dublin Cobble® (Lg Square)	60 mm	9" x 9"	60 mm							✓			✓		N/A	106
 Empire <i>(7 face styles sold on a single pallet)</i>	60 mm	3" x 12"	60 mm											✓	3 mm	110
 Holland Stone 4" x 4" <i>(special order)</i>	80 mm	4" x 4"	80 mm	80 mm	80 mm			✓		✓	✓	✓			7 mm	53.4
 Holland Stone 4" x 8" <i>(80mm special order)</i>	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm		✓	80 mm	✓	✓	✓	<i>special order</i>		7 mm	120 (60 mm) 96 (80 mm)
 Holland Stone 6" x 12" <i>(special order)</i>	60 mm 80 mm	6" x 12"	60 mm	80 mm				✓		✓	✓	✓			7 mm	116
 Holland Stone 12" x 24" <i>(special order)</i>	60 mm	12" x 24"	60 mm					✓		✓	✓	✓			7 mm	116
 Holland Stone 8" x 8" <i>(special order)</i>	60 mm 80 mm	8" x 8"	60 mm 80 mm	80 mm	80 mm			✓		✓	✓	✓			7 mm	130 (60 mm) 85 (80 mm)
 Holland Stone 8" x 12" <i>(special order)</i>	60 mm 80 mm	8" x 12"	60 mm 80 mm	80 mm				✓		✓	✓	✓			7 mm	106 (60 mm) 85 (80 mm)
 Holland Stone 8" x 16" <i>(special order)</i>	60 mm	8" x 16"	60 mm					✓		✓	✓	✓			7 mm	16
 Holland Stone 16" x 16" <i>(special order)</i>	60 mm	16" x 16"	60 mm					✓		✓	✓	✓			7 mm	106
 Holland Handicapped Stall Kit <i>(special order)</i>	80 mm	Various	80 mm	80 mm	80 mm			✓		✓	✓	✓			7 mm	16

* May be suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



VEHICULAR & ARCHITECTURAL PAVERS (CONTINUED)

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET
											Standard	Ground Face	Shot Blast		
 Mega-Arbel® <i>(special order)</i>	80 mm	15¾" x 21"	80 mm						✓					N/A	78.3
 Mega-Arbel® Patio Slab	60 mm	15¾" x 21"	60 mm						✓					N/A	104.4
 Mega-Bergerac® (3 pc)	80 mm	4¾" x 9¾" 9¾" x 9¾" 9¾" x 14¾"	80 mm	80 mm					✓			✓		N/A	88
 Mega-Bergerac® (Lg Square)	80 mm	14¾" x 14¾"	80 mm	80 mm					✓			✓		N/A	68
 Origins™ 18	60 mm	9" x 18" 18" x 18" 27" x 18"	60 mm					✓	✓				✓	3 mm	112.5
 Origins™ 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm					✓	✓				✓	3 mm	120
 Origins™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm					✓	✓					3 mm	120
 Origins™ Accent	60 mm	3" x 3"	60 mm					✓	✓					3 mm	96.25
 Origins™ Accent	60 mm	6" x 6"	60 mm					✓	✓					3 mm	120
 Origins™ Accent	60 mm	6" x 9"	60 mm					✓	✓					3 mm	112.5
 Plaza Paver	50 mm	23¾" x 23¾"	50 mm					✓	✓					3 mm	88
 Papyrus™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓					✓	3 mm	112.5

* May be suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.



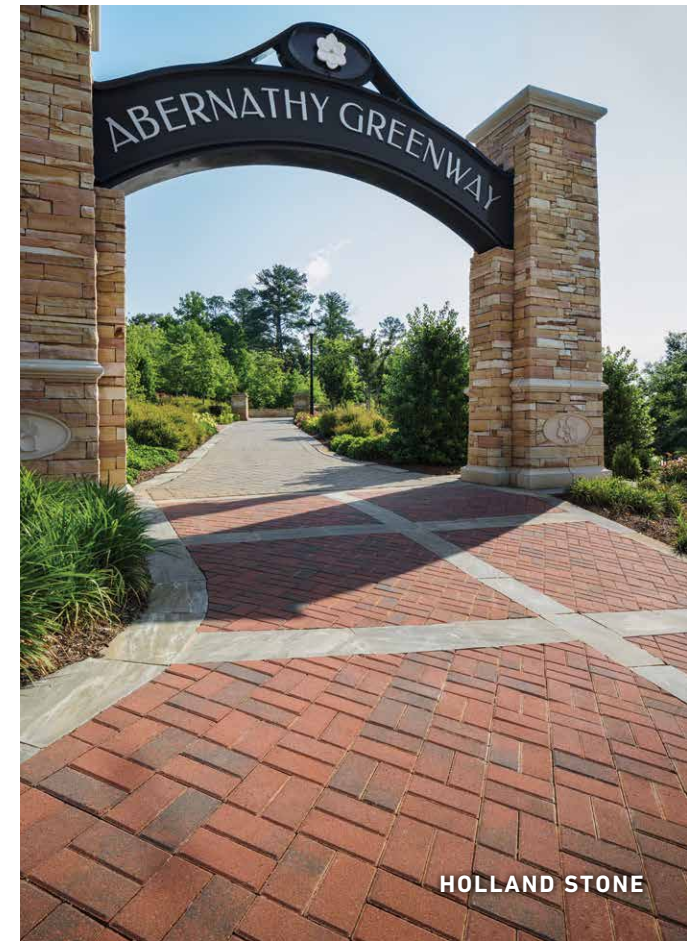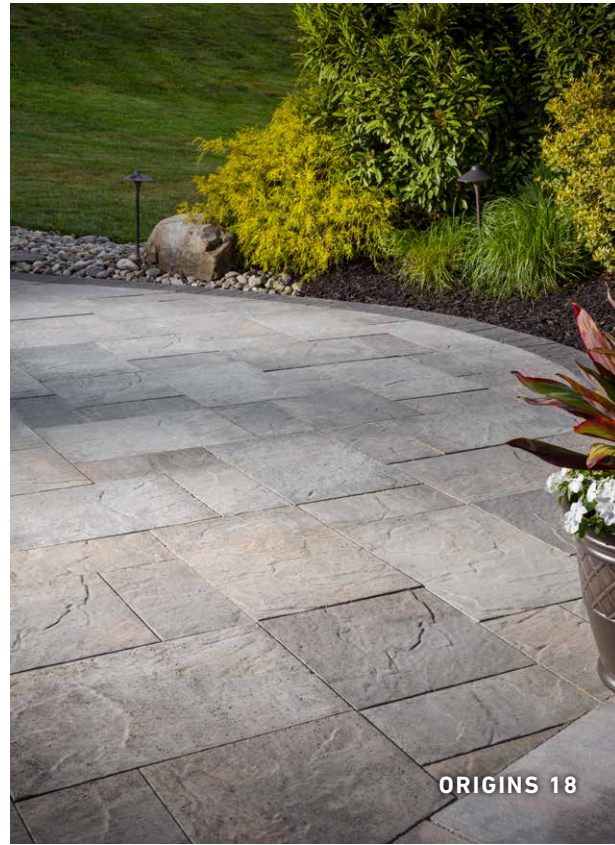




Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



PERMEABLE PAVERS


UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Ground Face	Shot Blast	Antiqued				
AQUALINE™ SERIES																
 3" x 12" <i>(special order)</i>	80 mm	3" x 12"	80 mm	80 mm			✓		✓	✓	✓		7 mm	10%	3 mm	88
 4.5" x 9" Herringbone <i>(special order)</i>	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	✓	✓	✓	✓	✓		10 mm	10%	3 mm	90
 6" x 6" <i>(special order)</i>	80 mm	6" x 6"	80 mm	80 mm	80 mm		✓		✓	✓	✓		7 mm	7%	3 mm	96
 6" x 12" <i>(special order)</i>	80 mm	6" x 12"	80 mm	80 mm			✓		✓	✓	✓		7 mm	5%	3 mm	96
 12" x 12" <i>(special order)</i>	80 mm	12" x 12"	80 mm	80 mm	80 mm		✓		✓	✓	✓		7 mm	3%	3 mm	96
ADDITIONAL PRODUCT LINES																
 Aqua Dublin	80 mm	3½" x 6¼" 6¼" x 6¼" 10¼" x 6¼"	80 mm	80 mm			✓	✓	✓	✓	✓		10 mm	10%	3 mm	90.8

CONCRETE GRID PAVEMENTS


UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				% SURFACE OPENING	SQ. FT. PER PALLET
									Standard	Ground Face	Shot Blast	Antiqued		
 Turfstone™	80 mm	15¾" x 23¾"	80 mm						✓				40%	101

* May be suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

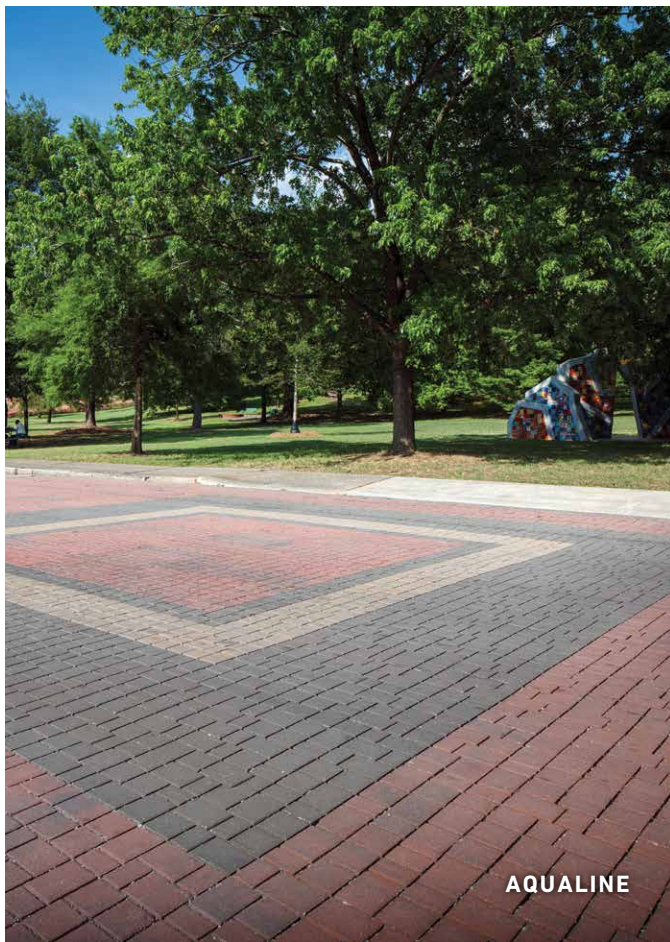


AQUALINE

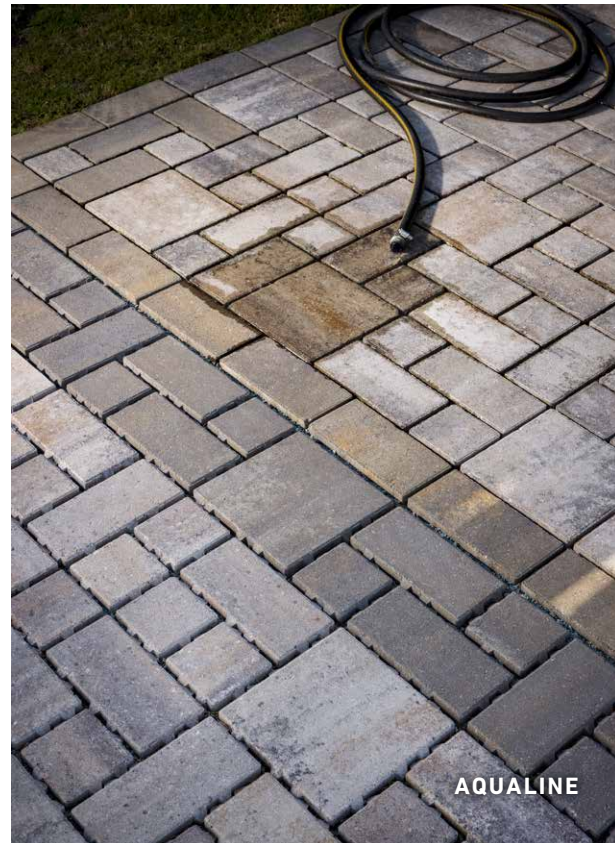


AQUALINE




AQUALINE

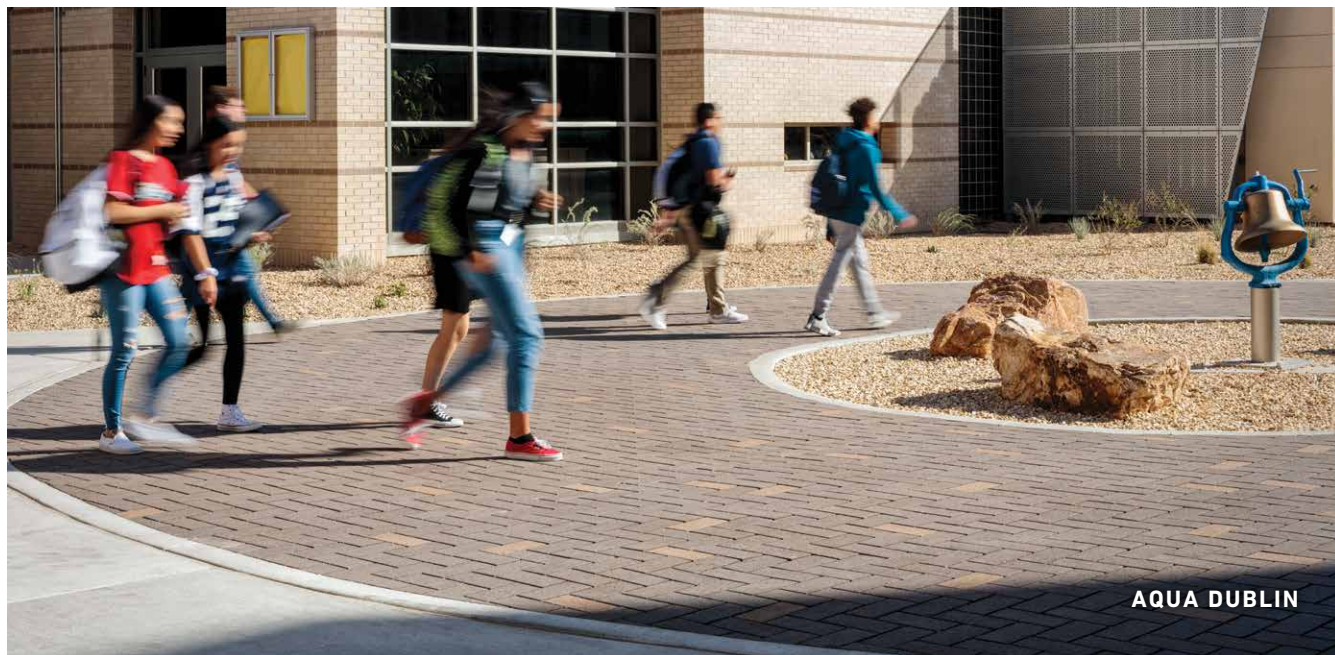

AQUA DUBLIN

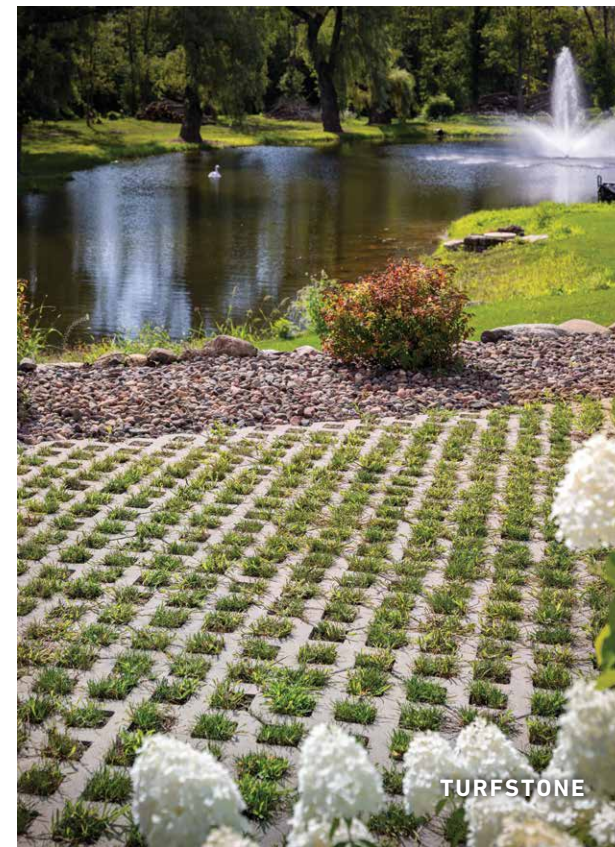

TURFSTONE

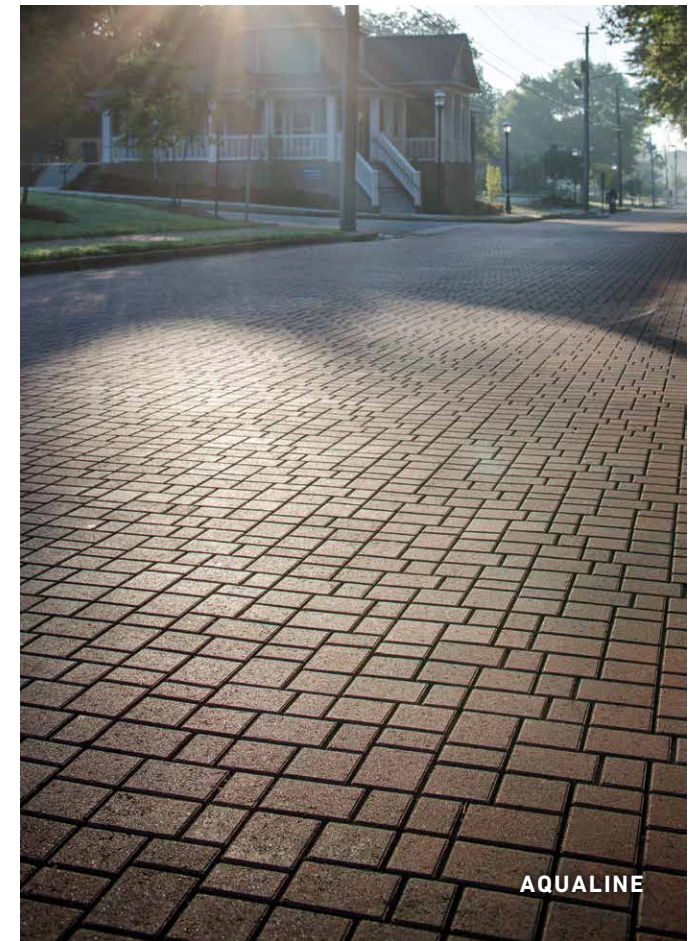

AQUALINE

PORCELAIN PAVERS

UNITS	APPEARANCE	THICKNESS	SIZE	STOCK COLOR OPTIONS <i>(UNLESS MARKED AS SPECIAL ORDER)</i>	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									
 Ardesie - 24 x 24	Stone	3/4"	24" x 24"	Shore, Island, African Stone	✓	✓	232.5	60	2,160
 Glocal - 24 x 24	Concrete	3/4"	24" x 24"	Clear, Ideal, Chamois, Type, Classic, Absolute	✓	✓	232.5	60	2,160
 Glocal - 24 x 48	Concrete	3/4"	24" x 48"	UT/ID - Ideal, Type, Classic, Absolute, Chamois, Clear CO - Ideal, Type, Classic, Absolute, Chamois	✓	✓	271.25	70	2,621
 Jurupa - 12 x 48	Wood	3/4"	12" x 48"	UT/ID - Cool, Master, Camp	✓	✓	279	72	2,664
 Lagoon - 24 x 48	Stone	3/4"	24" x 48"	Moonbeam, Sandshell, Atmosphere, Sharkskin, Cloudburst	✓	✓	271.25	70	2,621
 Lemmy - 32 x 32	Concrete	3/4"	32" x 32"	Nimbus, Excalibur	✓	✓	288.96	42	2,750
 Noon - 12 x 48	Wood	3/4"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,664
 Quarziti 2.0 - 24 x 24	Stone	3/4"	24" x 24"	Glacier, Mountains, Waterfall, River, Mantle	✓	✓	232.5	60	2,160
 Quarziti 2.0 - 24 x 48	Stone	3/4"	24" x 48"	Glacier, Mountains, Waterfall, River	✓	✓	271.25	70	2,621
 Quarziti 2.0 - 18 x 36	Stone	3/4"	18" x 36"	Glacier, Mountains, Waterfall, River	✓	✓	234.9	54	2,198
 Quarziti Modular (2 pc)	Stone	3/4"	12" x 24" 24" x 36"	Glacier, Mountains, Waterfall, River	✓	✓	279	72	2,808
 Silverlake - 24 x 24	Stone	3/4"	24" x 24"	UT/ID - Braies, Nemi, Orsi, Resia	✓	✓	232.5	60	2,160
 Silverlake - 24 x 48	Stone	3/4"	24" x 48"	Braies, Moritz, Nemi, Orsi, Resia	✓	✓	271.25	70	2,621
 Unico	Stone	3/4"	13" x 24"	African Stone (UT/ID only), Shore, Island, Ideal, Type, Clear, Classic, Absolute, Chamois, Daylight, Ember, Honey, Glacier, Mountains, Waterfall, River, Mantle, Blue Stone (CO only)			255.8	120	2,080
 Verona	Stone	3/4"	24" x 24"	UT/ID - Blue Stone, Platinum, Taos, Yukon CO - Blue Stone	✓	✓	232.5	60	2,160

ROOFTOP PAVERS & ACCESSORIES

UNITS	THICKNESS	SIZE	MATERIAL	FINISHES			PEDESTAL APPLICATION	PCS. PER PALLET	WEIGHT PER SQ. FT. (LBS)
				Smooth	Shot Blast	Ribbed			
ROOFTOP PAVERS									
Texada Plaza Slab	50 mm	12" x 24" 24" x 24"	Concrete	✓	✓		✓	24	23
Porcelain Plaza Pavers	¾"	See page 14	Porcelain	✓			✓	-	-
Western Plaza Slab	1 13/16"	24" x 24"	Concrete	✓	✓		✓	24	23
Wood Plaza Paver	1.5"	24" x 24" 24" x 48"	Ipe Wood, Cumaru, Bamboo, Tiger wood	✓		✓	✓	-	5.56
ACCESSORIES									
Cubes & Cube Tops <i>(Made to order, custom sizes available)</i>	-	24" x 24" x 16 1/2" 48" x 24" x 16 1/2"	Ipe Wood or Powder Coated Aluminum	✓			✓	-	-
Pedestals - Fixed Height	-	¼", ½", ¾" height	-				✓	100 pcs per box	-
Pedestals - Adjustable	-	1 ¼" - 36" height*	-				✓	30 pcs per box	-

Western Plaza Slab Colors




* Higher heights require extension couplers. Additionally, heights over 24" require bracing.


**SRI Color - Solar Reflective Index in excess of 80



SILVERLAKE

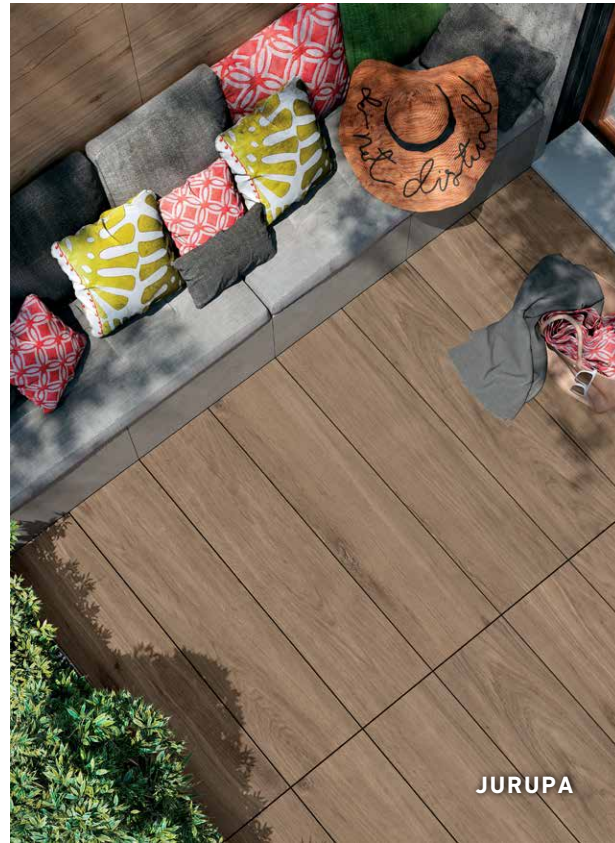

JURUPA

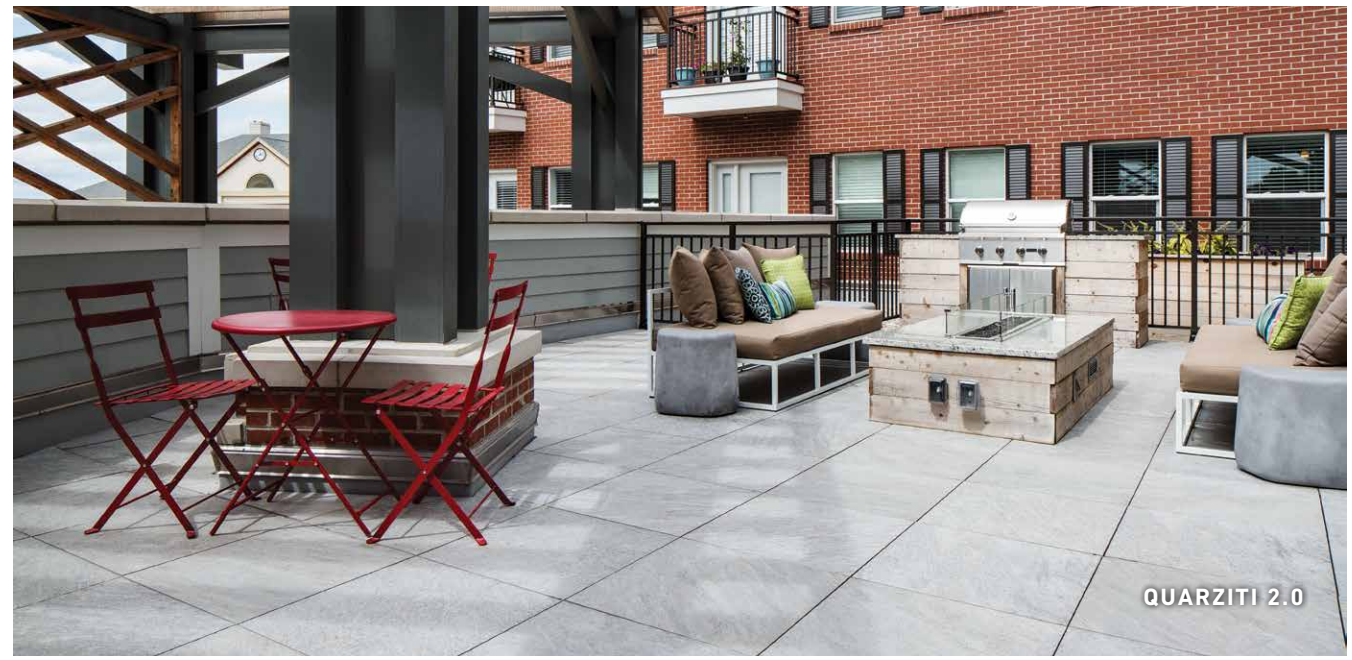

QUARZITI 2.0



GLOCAL



NOON



LAGOON


*If installing on elevated surface over 3/4" all porcelain must have a safety backing.
Spacers are required for all porcelain paver installations. For vehicular applications, there must be a mortar install over a concrete slab. Visit Belgard.com/porcelain for additional installation details.*

SEGMENTAL RETAINING AND FREESTANDING WALLS (SRW & FSW)


UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES		TEXTURE			FACE STYLES			BATTER/ SETBACK	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Smooth	Quarried		
 Ashlar Tandem™	7"	13 ³ / ₁₆ " 15 ¹³ / ₁₆ " 18 ⁷ / ₁₆ "	2 ⁵ / ₈ "	Modular Block	Reinforced Polypropylene Connectors	✓ <i>(Units used to create column/corner)</i>		✓			✓			0/4°	70.1
 Castlemanor® Cap PP	3"	14/8"	12"								✓			N/A	54 each
 Shelton™ Wall	6"	6/4", 12/10", 16/14"	10"		Fiberglass Pins	✓ <i>(Included on pallet)</i>				✓	✓			Vertical or 10.6°	25.83 untumbled 38.78 tumbled
 Shelton™ Wall Cap PP	3"	14/8"	12"							✓	✓			N/A	54 each
 Diamond Pro® PS	8"	18"	12"		Fiberglass Pins	✓ <i>(Sold separately)</i>			✓		✓	✓	✓	1.7° or 7.1°	32
 Melville™ Tandem	7"	13 ³ / ₁₆ " 15 ¹³ / ₁₆ " 18 ⁷ / ₁₆ "	2 ⁵ / ₈ "	Modular Block	Reinforced Polypropylene Connectors	✓ <i>(Units used to create column/corner)</i>					✓			0/4°	70.1
 Melville™ Wall <i>(Cap available in 2 x 20 x 13)</i>	4"	20"	10"											Vertical	26.67
 Melville™ Wall Cap	2"	20"	13"											Vertical	72 each
 Steeple Crest™	6"	6/4", 12/10", 16/14"	10"												25.83
 Tandem™ Cap	3 ¹ / ₄ "	24"	15"					✓			✓			N/A	32 each
 Universal Cap	4"	18"	12"						✓		✓			N/A	64 each
 Universal Corner	8"	18"	9"						✓		✓	✓	✓	N/A	XX
 Weston Stone™ Universal	4"	12"	8"			✓ <i>(Units used to create column/corner)</i>				✓	✓			Vertical	42



DIAMOND PRO PS STRAIGHT FACE

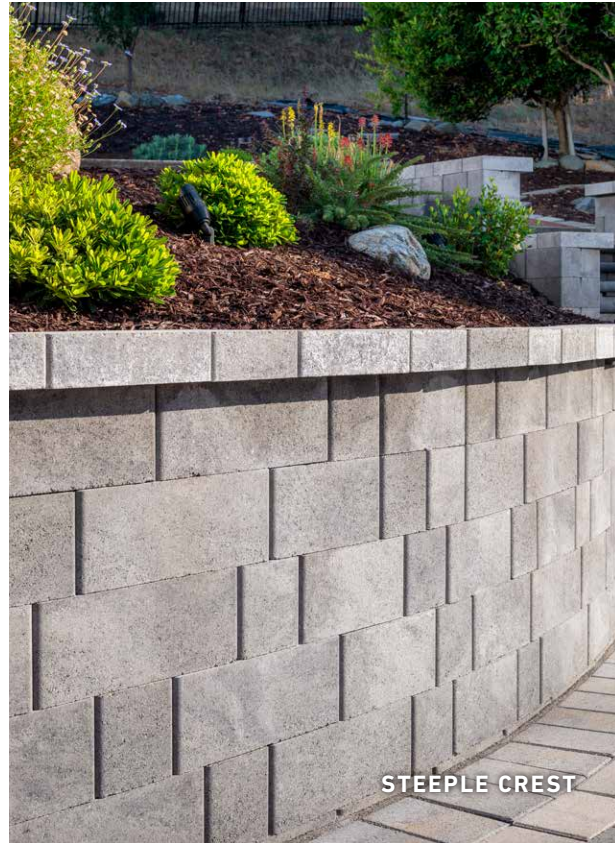


STEEPLE CREST

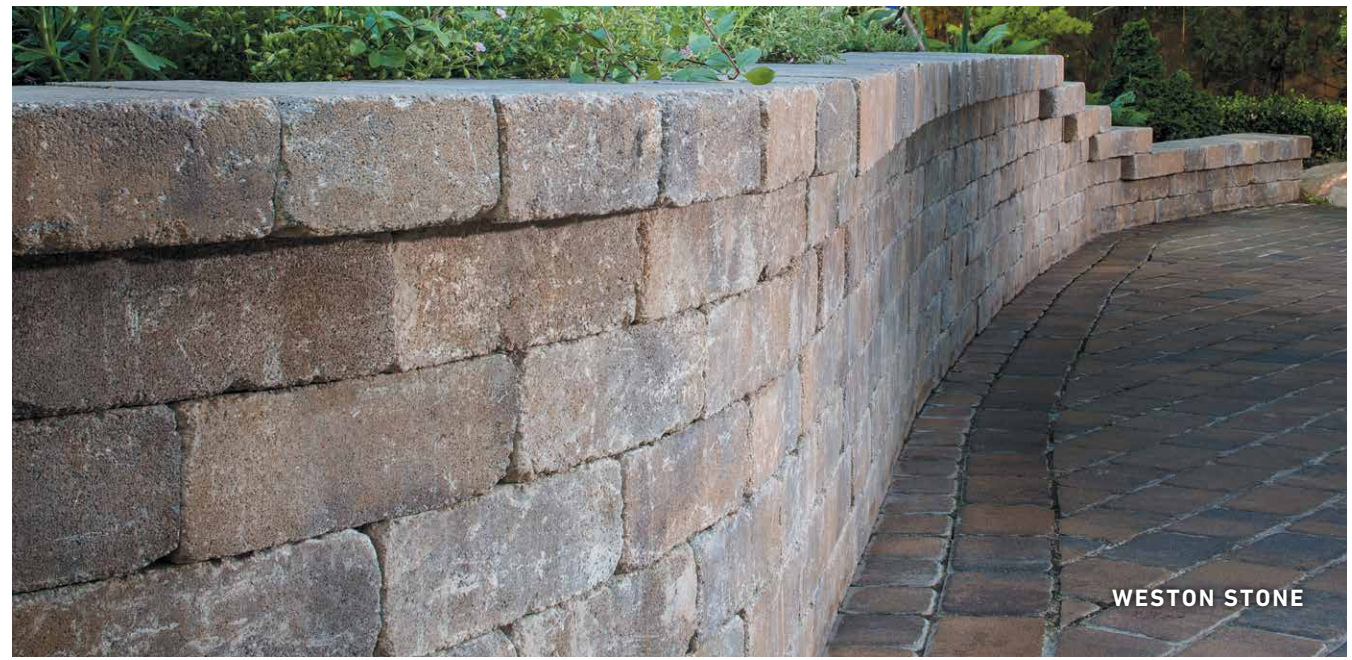


WESTON STONE



SHELTON WALL

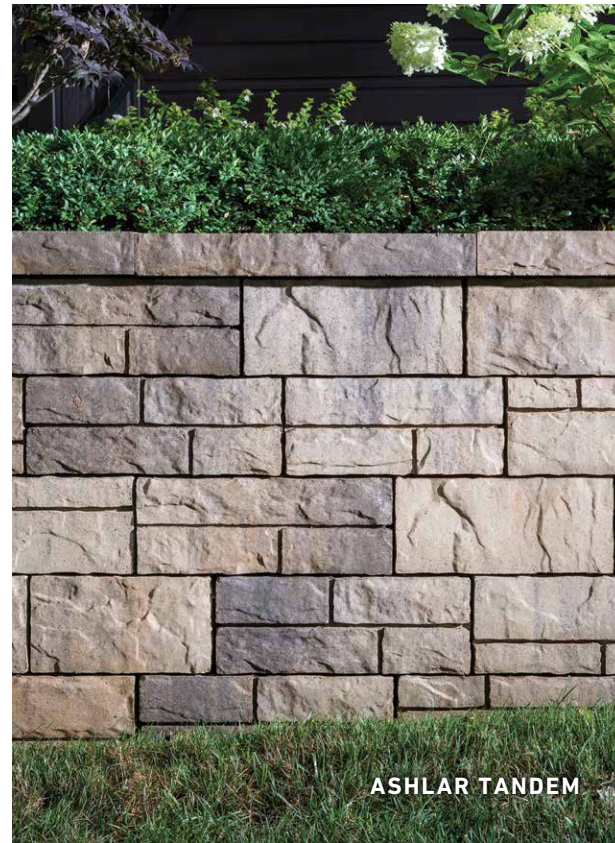

ASHLAR TANDEM

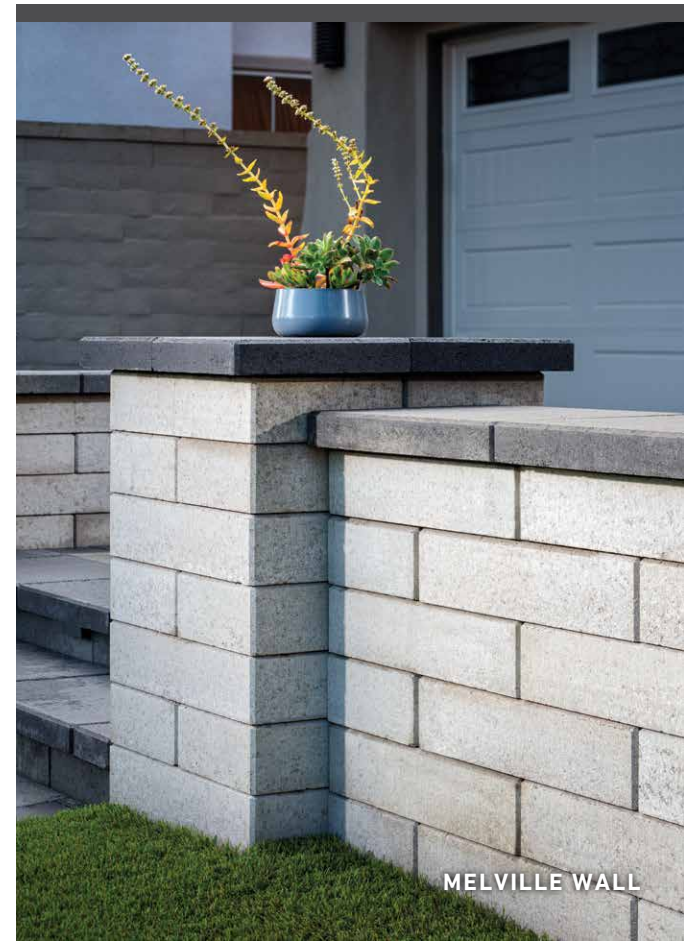

MELVILLE WALL





PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.

AMCOR LOCATIONS



333 S. Redwood Rd.
North Salt Lake, UT 84054
Ph: 801-936-7628
Toll Free: 800-800-4004

1820 E. CO-402
Loveland, CO 80537
Ph: 801-936-7628
Toll Free: 800-800-4004



[BELGARDCOMMERCIAL.COM](https://www.belgardcommercial.com)